

TOP END[®]

Everyday and Sport Series

Wheelchairs

Top End Everyday Series

Terminator[™] Titanium and Titanium Heavy Duty

Terminator[™] Everyday and Everyday Heavy Duty

Top End Sports Series

Terminator[™] BB

X-Terminator[™] BB

Paul Schulte Signature BB

X-Terminator[™] Titanium

X-Terminator[™] QR

Transformer[™] All Sport

DEALER: This manual **MUST** be given to the user of the wheelchair.

USER: BEFORE using this wheelchair, read this manual and save for future reference.

For more information regarding
Invacare products, parts, and services,
please visit www.invacare.com



Yes, you can.™

WARNING

DO NOT OPERATE THIS EQUIPMENT WITHOUT FIRST READING AND UNDERSTANDING THIS MANUAL. IF YOU ARE UNABLE TO UNDERSTAND THE WARNINGS, CAUTIONS AND INSTRUCTIONS, CONTACT YOUR INVACARE DEALER OR INVACARE CUSTOMER SUPPORT AT (800) 532-8677 BEFORE ATTEMPTING TO USE THIS EQUIPMENT - OTHERWISE INJURY AND/OR EQUIPMENT DAMAGE MAY OCCUR.

TABLE OF CONTENTS

REGISTER YOUR PRODUCT	6
SPECIAL NOTES	9
TYPICAL PRODUCT PARAMETERS	10
SECTION 1—GENERAL GUIDELINES	15
Operating Information.....	15
Tire Pressure and Information	17
Weight Training	17
Weight Limitation.....	17
SECTION 2—SAFE HANDLING	18
Stability and Balance.....	18
Coping with Everyday Obstacles.....	19
A Note to Wheelchair Assistants	19
Percentage of Weight Distribution	19
Reaching, Leaning and Bending - Forward.....	20
Reaching, Leaning - Backwards.	20
Tipping.....	21
Tipping - Curbs	21
Stairways.....	22
Transferring To and From Other Seats	23
SECTION 3—SAFETY INSPECTION	24
Safety Inspection Checklist.....	24
Inspect Initially	24
Inspect/Adjust Weekly.....	25
Inspect/Adjust Monthly.....	25
Inspect/Adjust Periodically.....	26
Troubleshooting.....	26
Maintenance	27
Maintenance Safety Precautions	27
Suggested Maintenance Procedures	27
SECTION 4—BACK	29
Unfolding/Folding the Back.....	29
Back Angle Adjustment.....	29
Adjusting/Replacing Back Upholstery.....	31
Top End Back Upholstery	31
Removing/Installing Foldover Back Upholstery.....	32
Custom Manual Adjustable Tension Back Upholstery	33
Back Height Adjustment (Adjustable Backs Only).....	34

TABLE OF CONTENTS

SECTION 5—SEAT	36
Replacing Top End Seat Upholstery	36
Replacing Custom Manual Screw-On Seat Upholstery	37
Transformer Seat Height Adjustment	37
Front Seat Height Adjustment	37
Rear Seat Height Adjustment	38
SECTION 6—WHEELS	39
Removing/Installing Rear Wheels	39
Adjusting Quick-Release Axles	40
Installing Quad-Release Axles	40
Adjusting Quad-Release Handles	41
In and/or Out	41
Removing Play from Rear Wheels	41
Handrim Replacement	42
Repairing/Replacing Rear Wheel, Tire/Tube	42
Opening/Closing Camber Clamps	43
Adjusting Rear Wheel Camber	45
Camber Tube 2000	45
A4 Camber System	45
Determining Toe In/Toe Out	46
Adjusting Toe In/Toe Out	47
Camber Tube 2000	47
A4 Camber System	48
Adjusting Wheelbase Length (Adjusting Center of Gravity)	50
Adjusting Wheelbase Width	52
Camber Tube 2000	52
A4 Camber System	52
Replacing Axle Tube	53
Adjusting the Axle Tube	55
Camber Tube 2000	56
A4 Camber System	56
Replacing/Adjusting Casters	58
Adjusting Front Caster Height	60
Wheel Lock Adjustment/Replacement	60
SECTION 7—FOOTREST/ ANTI-TIPPER	62
Adjusting/Replacing Standard Footrest	62

TABLE OF CONTENTS

If Replacing the Footrest	62
If Replacing or Adjusting the Footrest	62
Installing/Adjusting Optional Clamp on Raised Footrest	63
Installing.....	63
Adjusting	63
Installing/Adjusting Optional A4 Footrest	63
Replacing the Footrest.....	63
Footplate Angle Adjustment.....	64
Footplate Depth Adjustment	64
Installing the X-Terminator Footrest.....	64
Adjusting the X-terminator and Transformer Footrests	65
Depth Adjustment	65
Angle Adjustment	65
X-Terminator Height Adjustment	65
Transformer Height Adjustment.....	65
Anti-tipper Adjustment/Replacement.....	66
Anti-tipper Adjustment.....	67
Anti-tipper Replacement	67
Swivel Anti-Tip Installation/Removal/Adjustment.....	68
Installation/Depth Adjustment	68
Removal.....	68
Height Adjustment.....	69
SECTION 8—SUSPENSION	70
Elastomers and Suspension	70
Replacing Rear Elastomers	70
Replacing Front Elastomers.....	71
SECTION 9—WING/BUMPER	73
Wing/Bumper Installation and Removal	73
Wing/Bumper Installation.....	73
Wing/Bumper Removal.....	73
LIMITED WARRANTY	75

REGISTER YOUR PRODUCT

The benefits of registering:

1. Safeguard your investment.
2. Ensure long term maintenance and servicing of your purchase.
3. Receive updates with product information, maintenance tips, and industry news.
4. Invacare can contact you or your provider, if servicing is needed on your product.
5. It will enable Invacare to improve product designs based on your input and needs.

Register ONLINE at www.invacare.com

- or -

Complete and mail the form on the next page

Any registration information you submit will be used by Invacare Corporation only, and protected as required by applicable laws and regulations.



PRODUCT REGISTRATION FORM

Register **ONLINE** at www.invacare.com - or -
Complete and mail this form

Name _____

Address _____

City _____ State/Province _____

Zip/Postal Code _____

Email _____ Phone No. _____

Fold
here

Invacare Model No. _____ Serial No. _____

Purchased From _____ Date of Purchase: _____

1. Method of purchase: (check all that apply)

☐ Medicare ☐ Insurance ☐ Medicaid ☐ Other _____

2. This product was purchased for use by: (check one)

☐ Self ☐ Parent ☐ Spouse ☐ Other _____

3. Product was purchased for use at:

☐ Home ☐ Facility ☐ Other _____

4. I purchased an Invacare product because:

☐ Price ☐ Features (list features) _____

5. Who referred you to Invacare products? (check all that apply)

☐ Doctor ☐ Therapist ☐ Friend ☐ Relative ☐ Dealer/Provider ☐ Other _____

☐ Advertisement (circle one): TV, Radio, Magazine, Newspaper ☐ No Referral _____

6. What additional features, if any, would you like to see on this product?

Fold
here

7. Would you like information sent to you about Invacare products that may be available for a particular medical condition? ☐ Yes ☐ No

If yes, please list any condition(s) here and we will send you information by email and/or mail about any available Invacare products that may help treat, care for or manage such condition(s):

8. Would you like to receive updated information via email or regular mail about the Invacare home medical products sold by Invacare's dealers? ☐ Yes ☐ No

9. What would you like to see on the Invacare website?

10. Would you like to be part of future online surveys for Invacare products? ☐ Yes ☐ No

11. User's Year of birth: _____


If at any time you wish not to receive future mailings from us, please contact us at Invacare Corporation, CRM Department, 39400 Taylor Parkway, Elyria, OH 44035, or fax to 877-619-7996 and we will remove you from our mailing list.

To find more information about our products, visit www.invacare.com.

Cut Along Line




Fold
here



BUSINESS REPLY MAIL
FIRST-CLASS MAIL PERMIT NO. 196 ELYRIA OH
POSTAGE WILL BE PAID BY ADDRESSEE

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES




INVACARE CORPORATION
CRM DEPARTMENT
39400 TAYLOR PARKWAY
ELYRIA OH 44035-9836

Fold
here



Invacare Product Registration Form



Cut Along Line



SPECIAL NOTES

WARNING/CAUTION notices as used in this manual apply to hazards or unsafe practices which could result in personal injury or property damage.

NOTICE

THE INFORMATION CONTAINED IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE.

As a manufacturer of wheelchairs, Invacare endeavors to supply a wide variety of wheelchairs to meet many needs of the end user. However, final selection of the type of wheelchair to be used by an individual rests solely with the user and his/her healthcare professional capable of making such a selection.

WHEELCHAIR TIE-DOWN RESTRAINTS AND SEAT POSITIONING STRAPS

Invacare recommends that wheelchair users **NOT** be transported in vehicles of any kind while in wheelchairs. As of this date, the Department of Transportation has not approved any tie-down systems for transportation of a user while in a wheelchair, in a moving vehicle of any type.

It is Invacare's position that users of wheelchairs should be transferred into appropriate seating in vehicles for transportation and use be made of the restraints made available by the auto industry. Invacare cannot and does not recommend any wheelchair transportation systems.

AS REGARDS RESTRAINTS - SEAT POSITIONING STRAPS - IT IS THE OBLIGATION OF THE DME DEALER, THERAPISTS AND OTHER HEALTHCARE PROFESSIONALS TO DETERMINE IF A SEATING POSITIONING STRAP IS REQUIRED TO ENSURE THE SAFE OPERATION OF THIS EQUIPMENT BY THE USER. SERIOUS INJURY CAN OCCUR IN THE EVENT OF A FALL FROM A WHEELCHAIR.

WARNING

The seat positioning strap is a positioning belt only. It is not designed for use as a safety device withstanding high stress loads such as auto or aircraft safety belts. If signs of wear appear, belt **MUST** be replaced immediately.

Invacare products are specifically designed and manufactured for use in conjunction with Invacare accessories. Accessories designed by other manufacturers have not been tested by Invacare and are not recommended for use with Invacare products.

TYPICAL PRODUCT PARAMETERS

NOTE: All specifications are approximate.

	TERMINATOR	
	EVERYDAY (ED)	BASKETBALL
FRAME:	Rigid - 4130 Chrome-moly	
SEAT WIDTH:	12-20 inches - Outside to Outside of SEAT FRAME in 1-inch increments	
SEAT DEPTH:	14 to 17 Inches	
SEAT-TO-FLOOR:	Front - 17 to 21-inch, Rear -14 to 21-inch Front - 17 to 21-inch, Rear -13 to 21-inch	
BACK STYLE:	Fixed (Standard), Fold Down	
BACK HEIGHT		
FIXED:	8 to 16 inches	8 to 14 inches
ADJUSTABLE:	8 to 11, 10 to 14, 12 to 16, 14 to 18 and 16 to 20 inches in 1-inch increments	
BACK ANGLE		
FOLDING:	90° straight, 4° backward, 4° forward or 8° forward	
FIXED:	0°, 3°, 6° or 9°	
REAR-FRONT CASTER DISTANCE:	17 to 21 Inches (From outside of back of frame to center of front caster housing)	
FRONT CASTER TO FOOTPLATE DISTANCE:	3 to 5 inches	
FOOT WIDTH:	9 to 12 inches (Average is 10 inches between front of footrest bars)	
FOOTREST:	Tubular: 4-inch Height Adjustable (Standard)	
SIDE - WHEEL CLEARANCE:	Adjustable 1/2 to 1-1/2 inches	
REAR AXLE:	Adjustable Axle Position, Quick (Standard) or Quad-Release	
REAR WHEEL CAMBER		
CAMBER TUBE 2000:	0°, 3°, 6°, 9°, 12°, 15°, 18°, 20°	
A4™ CAMBER SYSTEM:	0°, 3°, 6°, 9°, 12°	Optional
REAR WHEELS AND TIRES	Double walled rim high flange hub (Standard), Spinergy® Spox	
22-INCH:	22x1-3/8-inch (Standard)	N/A
24-INCH (STANDARD):	Primo 25-540 (Standard), 24x1-3/8-inch, KIK® , Knobby	Primo 25-540 (Standard)
25-INCH:	Primo 25-559 (Standard), KIK, Knobby	Primo 25-559 (Standard)
26-INCH:	Primo 25-590 (Standard), 26x1-3/8-inch	Primo 25-590 (Standard)
700C:	Special Turbo (Standard)	
HANDRIMS:	Aluminum Welded Tab (Standard) Plastic Coated, Natural Fit®, Titanium	Aluminum Welded Tab (Standard), Titanium
WHEEL LOCKS:	High Mount, Low Mount (Standard)	N/A
FRONT FORKS:	Non-Suspension (Standard), Suspension	Non-Suspension
CASTER SIZE:	3, 4, 5 and 6-inch	3-inch Solid
BACK UPHOLSTERY:	U240 Black - Adjustable Tension	
WEIGHT:	20 lbs	
SHIPPING WEIGHT:	30 lbs	
WEIGHT LIMITATION:	250 lbs 350 lbs with Heavy Duty Package	250 lbs

NOTE: 15 x 15-inch seat, rear wheels and minimal options are included in the weight.

NOTE: All specifications are approximate.

	TERMINATOR TITANIUM	
	EVERYDAY (ED)	BASKETBALL
FRAME:	Rigid - 4130 Chrome-moly	
SEAT WIDTH:	12-20 inches - Outside to Outside of SEAT FRAME in 1-inch increments	
SEAT DEPTH:	14 to 18- nches	
SEAT-TO-FLOOR:	Front - 17 to 21-inch, Rear -14 to 21-inch	Front - 17 to 21-inch, Rear -13 to 21-inch
BACK STYLE:	Fixed (Standard), Fold Down	
BACK HEIGHT		
FIXED:	8 to 16 inches	8 to 14 inches
ADJUSTABLE:	8 to 11, 10 to 14, 12 to 16, 14 to 18 and 16 to 20 inches in 1-inch increments.	
BACK ANGLE		
FOLDING:	90° straight, 4° backward, 4° forward or 8° forward	
FIXED::	0°, 3°, 6° or 9°	
REAR-FRONT CASTER DISTANCE:	17 to 21 inches (From outside of back of frame to center of front caster housing)	
FRONT CASTER TO FOOTPLATE DISTANCE:	3 to 5 inches	
FOOT WIDTH:	9 to 12 inches (Average is 10-inches between front of footrest bars)	
FOOTREST:	Tubular: 4-inch Height Adjustable (Standard)	
SIDE - WHEEL CLEARANCE:	Adjustable 1/2 to 1-1/2-inches	
REAR AXLE:	Adjustable Axle Position, Quick (Standard) or Quad-Release	
REAR WHEEL CAMBER		
CAMBER TUBE 2000:	0°, 3°, 6°, 9°, 12°, 15°, 18°, 20°	
A4™ CAMBER SYSTEM:	0°, 3°, 6°, 9°, 12°	
REAR WHEELS AND TIRES:	Double walled rim high flange hub (Standard), Spinergy® Spox	
22-INCH:	22x1-3/8-inch (Standard)	N/A
24-INCH (STANDARD):	Primo 25-540 (Standard), 24x1-3/8-inch, KIK® , Knobby	Primo 25-540 (Standard)
25-INCH:	Primo 25-559 (Standard), KIK , Knobby	Primo 25-559 (Standard)
26-INCH:	Primo 25-590 (Standard), 26x1-3/8-inch	Primo 25-590 (Standard)
700C:	Special Turbo (Standard)	
HANDRIMS:	Aluminum Welded Tab (Standard) Plastic Coated, Natural Fit®, Titanium	Aluminum Welded Tab (Standard), Titanium
WHEEL LOCKS:	High Mount, Low Mount (Standard)	N/A
FRONT FORKS:	Non-Suspension (Standard), Suspension	Non-Suspension
CASTER SIZE:	3, 4, 5 and 6-inch	3-inch Solid
BACK UPHOLSTERY:	U240 Black - Adjustable Tension	
WEIGHT:	17 lbs	
SHIPPING WEIGHT:	30 lbs	
WEIGHT LIMITATION:	250 lbs 400 lbs with Heavy Duty Package	250 lbs

NOTE: 15 x 15-inch seat, rear wheels and minimal options are included in the weight.

TYPICAL PRODUCT PARAMETERS

NOTE: All specifications are approximate.

	X-TERMINATOR	
	BASKETBALL (BB) AND QUAD RUGBY	TITANIUM
FRAME:	Rigid - 4130 Chrome-moly	Rigid - 3-2.5 Titanium
SEAT WIDTH:	12-20 inches - Outside to Outside of SEAT FRAME in 1-inch increments	
SEAT DEPTH:	14 to 17-inches	
SEAT-TO-FLOOR:	Front - 17 to 21-inch, Rear - 13 to 21-inch	
BACK STYLE:	Fixed (Standard), Fold Down	
BACK HEIGHT		
FIXED:	8 to 14 inches	
ADJUSTABLE:	8 to 11, 10 to 14, 12 to 16, 14 to 18 and 16 to 20 inches in 1-inch increments.	
BACK ANGLE		
FOLDING:	90° straight, 4° backward, 4° forward or 8° forward	
FIXED::	0°, 3°, 6° or 9°	
REAR-FRONT CASTER DISTANCE:	22, 24, and 26 inches (From outside of back of frame to center of front caster housing)	
FOOT WIDTH:	9 to 12-inches (Average is 10-inches between front of footrest bars)	
FOOTREST:	Tubular: 4-inch Height Adjustable (Standard)	
SIDE - WHEEL CLEARANCE:	Adjustable 1/2 to 1-1/2-inches	
REAR AXLE:	Adjustable Axle Position, Quick (Standard) or Quad-Release	
REAR WHEEL CAMBER		
CAMBER TUBE 2000:	0°, 3°, 6°, 9°, 12°, 15°, 18°, 20°	
A4™ CAMBER SYSTEM:	N/A	
REAR WHEELS AND TIRES:	Double walled rim high flange hub (Standard), Spinergy® Spox	
24-INCH (STANDARD):	Primo 25-540	
25-INCH:	Primo 25-559 (Standard)	
26-INCH:	Primo 25-590 (Standard)	
700C:	Special Turbo (Standard)	
HANDRIMS:	Aluminum Welded Tab, Titanium	
WHEEL LOCKS:	High Mount, Low Mount (Standard)	N/A
FRONT FORKS:	Non-Suspension	
CASTER SIZE:	3-inch Solid	
BACK UPHOLSTERY:	U240 Black - Adjustable Tension	
WEIGHT:	23 lbs	
SHIPPING WEIGHT:	30 lbs	
WEIGHT LIMITATION:	250 lbs	

NOTE: 15 x 15-inch seat, rear wheels and minimal options are included in the weight.

NOTE: All specifications are approximate.

	PAUL SCHULTE SIGNATURE BB
FRAME:	Rigid - 6061T6 Aluminum or 3-2.5 Titanium
SEAT WIDTH:	12-19 inches - Outside to Outside of SEAT FRAME in 1-inch increments
SEAT DEPTH:	14 to 18-inches
SEAT-TO-FLOOR:	Front - 17 to 21-inch, Rear - 13 to 21-inch
BACK STYLE:	Fixed
BACK HEIGHT	
FIXED:	8 to 14 inches
ADJUSTABLE:	11 to 14, 14 to 18, 16 to 20 inches in 1-inch increments.
BACK ANGLE:	Fixed 0° (Set at 90° to floor)
WHEELBASE:	16, 17, 18, or 19 inches
FOOTREST:	Tubular: 4-inch Height Adjustment
SIDE - WHEEL CLEARANCE:	Adjustable 1/2 to 1-1/2-inches
REAR AXLE:	Fixed Axle Position, Quick Release (Standard)
REAR WHEEL CAMBER:	Fixed: 12°, 15°, 18° or 20°
REAR WHEELS 24-INCH (STANDARD): 25-INCH: 26-INCH: 700C:	Double Walled Rim High Flange Hub (Standard), Cross Spoke, Spinergy® Spox (Optional)
HANDRIMS:	Aluminum Welded Tab (Standard), Titanium (Optional)
WHEEL LOCKS:	N/A
FRONT FORKS:	Fits 3-inch Wheel Non-Suspension (Standard)
CASTER SIZE:	3-inch Solid (Standard), Lighted (Optional)
BACK UPHOLSTERY:	U240 Black - Adjustable Tension
WEIGHT:	22 lbs Aluminium), 20 lbs (Titanium)
SHIPPING WEIGHT:	30 lbs
WEIGHT LIMITATION:	250 lbs

NOTE: 15 x 15-inch seat, rear wheels and minimal options are included in the weight.

TYPICAL PRODUCT PARAMETERS

NOTE: All specifications are approximate.

	TRANSFORMER ALL-SPORT
FRAME:	Rigid - 6061T6 Aluminium
SEAT WIDTH:	12-20 inches - Outside to Outside of SEAT FRAME in 1-inch increments
SEAT DEPTH:	12 to 20-inches
SEAT-TO-FLOOR:	
TALL FRAME:	Front - 18 to 21-inch, Rear -15 to 21-inch
SHORT FRAME	Front - 16 to 18-inch, Rear -15 to 18-inch
BACK STYLE:	Fixed, Fold Down
BACK HEIGHT:	
FIXED:	8 to 14 inches
ADJUSTABLE:	8 to 11, 10 to 14, 12 to 16 and 14 to 18 in 1-inch increments.
BACK ANGLE:	Fixed 0° (Set at 90° to floor)
FOLDING:	Adjustable in 5° increments
FIXED:	Set at 90° to floor
FRAME LENGTH:	
FRAME W/FOLDING BACK:	Seat depth plus 10 inches
FRAME W/FIXED BACK:	Seat depth plus 8 inches
FOOTREST:	Recessed: 4-inch Height/Angle Adjustable, Solid Platform (Standard)
SIDE - WHEEL CLEARANCE:	Adjustable 1/2 to 1-1/2 inches
REAR AXLE:	Adjustable Axle Position, Quick-Release
REAR WHEEL CAMBER:	Fixed: 12°, 15°, 18° or 20°
CAMBER TUBE 2000:	0°, 3°, 6°, 12°, 15°, 18°, 20°
A4 CAMBER SYSTEM:	Optional
REAR WHEELS:	Double walled rim high flange hub (standard), Spinergy® Spox (optional)
24-INCH (STANDARD):	Primo 25-540, Continental (Optional)
25-INCH:	Primo 25-559 (Standard)
26-INCH:	Primo 25-590 (Standard)
700C:	Special Turbo (Standard)
HANDRIMS:	Aluminum Welded Tab (Standard)
WHEEL LOCKS:	N/A
FRONT FORKS:	Non-Suspension (Standard)
CASTER SIZE:	3-inch
BACK UPHOLSTERY:	U240 Black - Foldover
WEIGHT:	20 lbs.
SHIPPING WEIGHT:	30 lbs.
WEIGHT LIMITATION:	250 lbs.

NOTE: 15 x 15-inch seat, rear wheels and minimal options are included in the weight.

SECTION I—GENERAL GUIDELINES

⚠ STABILITY WARNING

The position of the footrest, camber tube, back angle, the tautness of the back upholstery as well as the user's condition are directly related to the wheelchairs stability. Any change to one (1) or any combination of the five (5) may cause the wheelchair to decrease in stability. Use **EXTREME** caution when using a new seating position. The addition of anti-tippers may be required .

	FOOTREST POSITION	CAMBER TUBE	BACK ANGLE	BACK UPHOLSTERY	USER CONDITION
FOOTREST POSITION	●		✓		✓
CAMBER TUBE		●	✓		✓
BACK ANGLE	✓		●	✓	✓
BACK UPHOLSTERY			✓	●	✓
USER CONDITION	✓	✓	✓	✓	●

NOTE: When changes to the left hand column occur, follow across the chart and refer to the ✓ procedure to maintain the proper stability, safety and handling of the racing chair.

Operating Information

⚠ WARNING

To determine and establish your particular safety limits, practice bending, reaching and transferring activities in several combinations in the presence of a qualified healthcare professional **BEFORE** attempting active use of the wheelchair.

DO NOT attempt to reach objects if you have to move forward in the seat.

DO NOT attempt to reach objects if you have to pick them up from the floor by reaching down between your knees.

DO NOT lean over the top of the back upholstery to reach objects from behind as this may cause the wheelchair to tip over.

DO NOT shift your weight or sitting position toward the direction you are reaching as the wheelchair may tip over.

DO NOT tip the wheelchair without assistance.

⚠ WARNING

DO NOT use an escalator to move a wheelchair between floors. Serious bodily injury may occur. Before attempting to transfer in or out of the wheelchair, every precaution should be taken to reduce the gap distance. Turn both casters parallel to the object you are transferring onto. Also be certain the wheel locks are engaged to prevent the wheels from moving.

DO NOT operate on roads, streets or highways.

DO NOT climb, go up or down ramps or traverse slopes greater than 9°.

DO NOT attempt to move up or down an incline with a water, ice or oil film.

DO NOT attempt to ride over curbs or obstacles. Doing so may cause your wheelchair to turn over and cause bodily harm or damage to the wheelchair.

Invacare products are specifically designed and manufactured for use in conjunction with Invacare accessories. Accessories designed by other manufacturers have not been tested by Invacare and are not recommended for use with Invacare products.

DO NOT attempt to lift the wheelchair by any removable (detachable) parts. Lifting by means of any removable (detachable) parts of a wheelchair may result in injury to the user or damage to the wheelchair.

DO NOT stand on the frame of the wheelchair.

Check **ALL** allen screws that secure the footrest/raised footrest system to the chair frame **BEFORE** using the wheelchair, **ESPECIALLY** if engaging in **ANY** contact sport.

Anti-tippers **MUST BE** attached at all times. Inasmuch as the anti-tippers are an option on this wheelchair (you may order with or without the anti-tippers), Invacare strongly recommends ordering the anti-tippers as an additional safeguard for the wheelchair user.

Anti-tippers **MUST** be used at all times. when outdoors on wet, soft ground or on gravel surfaces, anti-tippers may not provide the same level of protection against tip over. Extra caution **MUST** be observed when traversing such surfaces.

Unless otherwise noted, all service and adjustments should be performed while the wheelchair is unoccupied.

ALWAYS wear your seat positioning strap. Inasmuch as the **SEAT POSITIONING STRAP** is an option on this wheelchair (You may order with or without the seat positioning strap), Invacare Top End strongly recommends ordering the seat positioning strap as an additional safeguard for the wheelchair user.

The seat positioning strap is a positioning belt only. It is not designed for use as a safety device withstanding high stress loads such as auto or aircraft safety belts. If signs of wear appear, belt **MUST** be replaced immediately.

ALWAYS use the handrims for self-propulsion. Inasmuch as the **HANDRIMS** are an option on this wheelchair (you may order with or without the handrims), Invacare strongly recommends ordering the handrims as an additional safeguard for the wheelchair user.

Tire Pressure and Information

WARNING

DO NOT use your wheelchair unless it has the proper tire pressure (p.s.i.). **DO NOT** overinflate the tires. Failure to follow these suggestions may cause the tire to explode and cause bodily harm. The recommended tire pressure is on the sidewall of the tire.

Replacement of the tire or tube **MUST** be performed by a qualified technician.

Weight Training

WARNING

Invacare **DOES NOT** recommend the use of its wheelchairs as a weight training apparatus. Invacare wheelchairs have **NOT** been designed or tested as a seat for any kind of weight training. If occupant uses said wheelchair as a weight training apparatus, Invacare shall **NOT** be liable for bodily injury and the warranty is void.

Weight Limitation

WARNING

Invacare's Top End Everyday and Sport Series wheelchairs (Terminator Titanium, Terminator Everyday, Terminator **BB**, X-Terminator **BB**, Paul Schulte Signature **BB**, X-Terminator titanium, X-terminator Quad Rugby **QR** and Transformer **All Sport**) have a weight limitation of 250 lbs.

Terminator Everyday wheelchairs with the heavy duty option have a weight limitation of 350 lbs.

Terminator Titanium wheelchairs with the heavy duty option have a weight limitation of 400 lbs.

DO NOT use the footplate as a platform when getting in or out of the wheelchair.

SECTION 2—SAFE HANDLING

“Safety and Handling” of the wheelchair requires the close attention of the wheelchair user as well as the assistant. This manual points out the most common procedures and techniques involved in the safe operation and maintenance of the wheelchair. It is important to practice and master these safe techniques until you are comfortable in maneuvering around the frequently encountered architectural barriers.

Use this information only as a “basic” guide. The techniques that are discussed on the following pages have been used successfully by many.

Individual wheelchair users often develop skills to deal with daily living activities that may differ from those described in this manual. Invacare recognizes and encourages each individual to try what works best for him/her in overcoming architectural obstacles that they may encounter, however, ALL WARNINGS and CAUTIONS given in this manual **MUST** be followed. Techniques in this manual are a starting point for the new wheelchair user and assistant with “safety” as the most important consideration for all.

Stability and Balance

WARNING

ALWAYS wear your seat positioning strap. Inasmuch as the **SEAT POSITIONING STRAP** is an option on this wheelchair (you may order with or without the seat positioning strap), Invacare strongly recommends ordering the seat positioning strap as an additional safeguard for the wheelchair user.

The seat positioning strap is a positioning belt only. It is not designed for use as a safety device withstanding high stress loads such as auto or aircraft safety belts. If signs of wear appear, belt **MUST** be replaced immediately.

Anti-tippers MUST BE attached at all times. Inasmuch as the anti-tippers are an option on this wheelchair (you may order with or without the anti-tippers), Invacare strongly recommends ordering the anti-tippers as an additional safeguard for the wheelchair user.

To assure stability and proper operation of your wheelchair, you must at all times maintain proper balance. Your wheelchair has been designed to remain upright and stable during normal daily activities as long as you do not move beyond the center of gravity.

Virtually all activities which involve movement in the wheelchair have an effect on the center of gravity. Invacare recommends using seat positioning straps for additional safety while involved in activities that shift your weight.

DO NOT lean forward out of the wheelchair any further than stability will allow. Make sure casters are pointing in the forward position whenever you lean forward. This can be achieved by advancing the wheelchair and then reversing it in a straight line.

Coping with Everyday Obstacles

Coping with the irritation of everyday obstacles can be alleviated somewhat by learning how to manage your wheelchair. Keep in mind your center of gravity to maintain stability and balance.

A Note to Wheelchair Assistants

When assistance to the wheelchair user is required, remember to use good body mechanics. Keep your back straight and bend your knees whenever tilting the wheelchair or traversing curbs, or other impediments.

WARNING

Do not attempt to lift a wheelchair by lifting on any removable (detachable) parts. Lifting by means of any removable (detachable) parts of a wheelchair may result in injury to the user or damage to the wheelchair.

Also, be aware of any removable (detachable) parts. These must NEVER be used to move the wheelchair or as lifting supports, as they may be inadvertently released, resulting in possible injury to the user and/or assistant(s).

When learning a new assistance technique, have an experienced assistant help you before attempting it alone.

Percentage of Weight Distribution

WARNING

DO NOT attempt to reach objects if you have to move forward in the seat or pick them up from the floor by reaching down between your knees.

The position of the footrest, camber tube, back angle, the tautness of the back upholstery as well as the user's condition are directly related to the wheelchair's stability. Any change to one (1) or any combination of the five (5) may cause the wheelchair to decrease in stability. Use EXTREME caution when using a new seating position. The addition of anti-tippers may be required.


Many activities require the wheelchair owner to reach, bend and transfer in and out of the wheelchair. These movements will cause a change to the normal balance, the center of gravity, and the weight distribution of the wheelchair.

To determine and establish your particular safety limits, practice bending, reaching and transferring activities in several combinations in the presence of a qualified health-care professional BEFORE attempting active use of wheelchair.

Proper positioning is essential for your safety. When reaching, leaning, bending forward, it is important to use the front casters as a tool to maintain stability and balance.

LENGTHENING THE WHEELBASE will increase the stability and maintain standard maneuverability of wheelchair.

SHORTENING THE WHEELBASE will decrease the stability, increase the maneuverability and distribute additional weight onto the rear wheels.

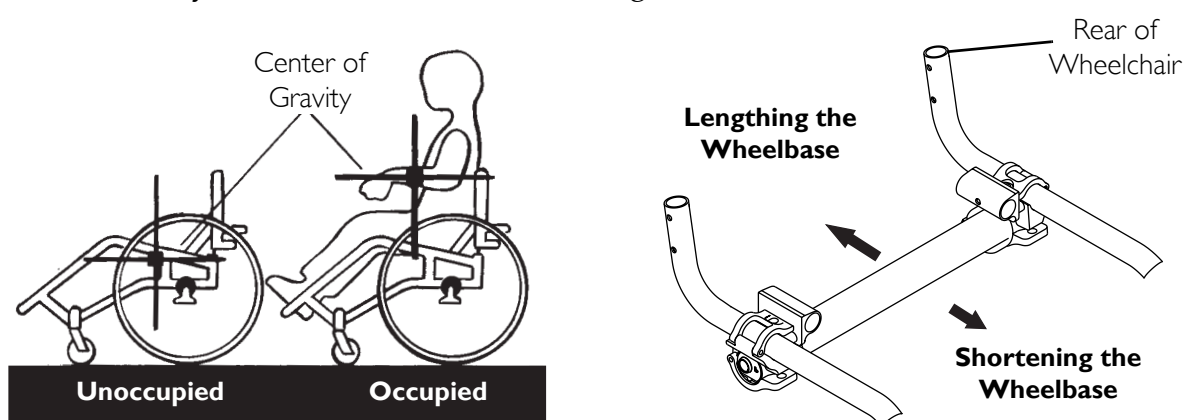


Reaching, Leaning and Bending - Forward

Position the front casters so that they are extended as far forward as possible and engage wheel locks.

⚠ WARNING

DO NOT attempt to reach objects if you have to move forward in the seat or pick them up from the floor by reaching down between your knees.

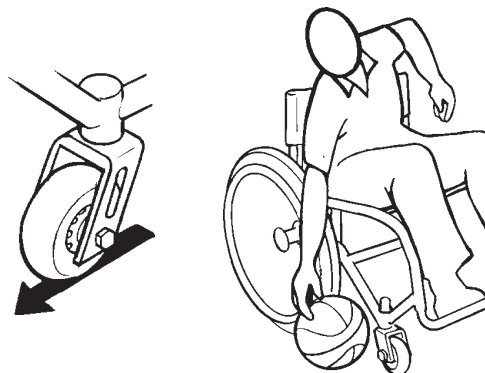

Reaching, Leaning, and Bending - Forward

Reaching, Leaning - Backwards.

⚠ WARNING

DO NOT lean over the top of the back upholstery. This will change your center of gravity and may cause you to tip over.



Tipping

WARNING

DO NOT tip the wheelchair without assistance.

DO NOT let the wheelchair drop the last few inches to the ground. This could result in injury to the occupant.

When tipping the wheelchair, an assistant should grasp the back of the wheelchair on a non-removable (non-detachable) part. Inform the wheelchair occupant before tilting the wheelchair and remind him/her to lean back. Be sure the occupant's feet and hands are clear of all wheels and/or pinch points. Apply a continuous motion until the balance point is achieved. At this point, the assistant will feel a difference in the weight distribution. Turn the wheelchair in the desired direction if necessary. Slowly lower the wheelchair in one continuous movement.

Tipping - Curbs

WARNING

Invacare does not recommend that sport wheelchairs be used where traversing curbs present an obstacle. Possible injury to occupant and/or assistant(s) can occur. Transfer to an everyday use wheelchair is recommended if any such obstacles may be encountered.

After mastering the techniques of tipping the wheelchair, use the following method to tackle curbs, short stairs, etc.


Turn the anti-tippers, if equipped, so the wheels are facing UP. Unless the first assistant has exceptional upper body strength, it is recommended that two (2) assistants perform this operation. The second assistant should be positioned at the front of the wheelchair lifting upward on a non-removable (non-detachable) part of the wheelchair frame when lifting the wheelchair and stabilizing the wheelchair when the wheelchair is being lowered to the ground.

The first assistant should stand on the sidewalk and turn the wheelchair so that the rear wheels are against the curb. The wheelchair should be tilted back to the balance point and, in one continuous upward movement, the rear wheels should be pulled up and over the curb. **DO NOT** return the front casters to the ground until the wheelchair has been pulled backward far enough for the front casters to clear the edge of the curb.

⚠ WARNING

When lowering the front casters of the wheelchair, DO NOT let the wheelchair drop the last few inches to the ground. This could result in injury to the occupant and/or damage to the wheelchair.

Roll the wheelchair backward and **SLOWLY** lower the wheelchair in one continuous movement. **DO NOT** let the wheelchair drop the last few inches to the ground. This could result in injury to the occupant. Turn the anti-tippers so the wheels are facing **DOWN**.

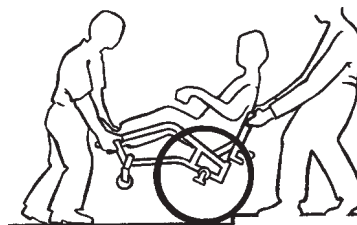

Stairways

⚠ WARNING

Concerning stairway access; Invacare does not recommend that wheelchairs be transported up or down stairways with occupant in the wheelchair. Possible injury to occupant and/or assistant(s) can occur. Transfer to an everyday use wheelchair is recommended.

DO NOT attempt to lift the wheelchair by any removable (detachable) parts. Lifting by means of any removable (detachable) parts of a wheelchair may result in injury to the user or damage to the wheelchair.

Extreme caution is advised when it is necessary to move an occupied wheelchair up or down a stairway. Invacare recommends that, if possible, the user be removed from the wheelchair prior to moving. Invacare recommends using two (2) assistants and making thorough preparations. Make sure to use ONLY secure, non-detachable parts for hand-held supports.

Follow this procedure for moving the wheelchair between floors when an elevator is NOT available:

1. If equipped, turn the anti-tippers UP. Refer to Footrest/ Anti-Tipper on page 62 in this manual.
2. After the wheelchair has been tilted back to the balance point, one assistant (in the rear) backs the wheelchair up against the first step, while securely grasping a non-removable (non-detachable) part of the wheelchair for leverage.

3. The second assistant, with a firm hold on a non-detachable part of the framework, lifts the wheelchair up and over the stair and steadies it as the first assistant places one foot on the next stair and repeats procedure.
4. The wheelchair should not be lowered until the last stair has been negotiated and it has been rolled away from the stairway.
5. If equipped, turn the anti-tippers DOWN. Refer to Footrest/ Anti-Tipper on page 62 in this manual.

⚠ WARNING

DO NOT use an escalator to move a wheelchair between floors. Serious bodily injury may occur.

Transferring To and From Other Seats

⚠ WARNING

BEFORE attempting to transfer in or out of the wheelchair, every precaution should be taken to reduce the gap distance. Turn both casters parallel to the object you are transferring onto. Also be certain the wheel locks are engaged to help prevent the wheels from moving.

When transferring, position yourself as far back as possible in the seat. This will prevent damaged upholstery and the possibility of the wheelchair tipping forward.

NOTE: This activity may be performed independently provided you have adequate mobility and upper body strength.

Position the wheelchair as close as possible along side the seat to which you are transferring, with the front casters parallel to it. Remove the armrest, if installed. Engage wheel locks. Shift body weight into seat with transfer.

During independent transfer, little or no seat platform will be beneath you. Use a transfer board if at all possible.



SECTION 3—SAFETY INSPECTION

NOTE: Every six (6) months, take your wheelchair to a qualified technician for a thorough inspection and servicing. Regular cleaning will reveal loose or worn parts and enhance the smooth operation of your wheelchair. To operate properly and safely, your wheelchair must be cared for just like any other vehicle. Routine maintenance will extend the life and efficiency of your wheelchair. Clean upholstery with mild soap and water or spray disinfectant using a sponge. DO NOT use bleach or wash in a washing machine.

Safety Inspection Checklist

Initial adjustments should be made to suit your personal body structure and preference. Thereafter follow these maintenance procedures:

Inspect Initially

- ☐ Ensure wheelchair rolls straight (no excessive drag/pull to one side).
- ☐ Ensure wheel locks DO NOT interfere with tires when rolling.
- ☐ Ensure pivot points are free of wear and looseness.
- ☐ Ensure wheel locks are easy to engage.
- ☐ Inspect seat and back upholstery for rips or sagging.
- ☐ Inspect upholstery fastening flaps to ensure they securely latch.
- ☐ Inspect seat positioning strap for any signs of wear. Ensure buckle latches. Verify hardware that attaches strap to frame is secure and undamaged. Replace if necessary.
- ☐ Ensure hand grips (if equipped) are not loose.
- ☐ Ensure quick release axles and camber inserts are clean.
- ☐ Ensure adjustable axle position camber bar is securely tightened.
- ☐ Ensure quick/quad release axles lock properly.
- ☐ Ensure no excessive side movement or binding when lifted and spun.
- ☐ Inspect handrims for signs of rough edges or peeling.
- ☐ Inspect spokes for bent or broken spokes.
- ☐ Ensure all spokes are uniformly tight.
- ☐ Clean upholstery and armrests.

CAUTION

As with any vehicle, the wheels and tires should be checked periodically for cracks and wear, and should be replaced if damaged.

- ☐ Inspect wheel/fork assembly for proper tension by spinning caster; caster should come to a gradual stop.

- ☐ Loosen/tighten locknut if wheel wobbles noticeably or binds to a stop.
- ☐ Ensure wheel bearings are clean and free of moisture.
- ☐ Inspect tires for flat spots and wear.
- ☐ If pneumatic tires check for proper inflation.

Inspect/Adjust Weekly

- ☐ Ensure hand grips (if equipped) are not loose.
- ☐ Ensure quick release axles and camber inserts are clean.
- ☐ Ensure quick/quad release axles lock properly.
- ☐ Inspect handrims for signs of rough edges or peeling.
- ☐ Inspect spokes for bent or broken spokes.
- ☐ Ensure All spokes uniformly tight.

⚠ CAUTION

As with any vehicle, the wheels and tires should be checked periodically for cracks and wear, and should be replaced if damaged.

- ☐ Inspect wheel/fork assembly for proper tension by spinning caster; caster should come to a gradual stop.
- ☐ Inspect tires for flat spots and wear.
- ☐ If pneumatic tires check for proper inflation.

Inspect/Adjust Monthly

- ☐ Ensure wheel locks DO NOT interfere with tires when rolling.
- ☐ Ensure pivot points are free of wear and looseness.
- ☐ Inspect upholstery fastening flaps to ensure they securely latch.
- ☐ Inspect seat positioning strap for any signs of wear. Ensure buckle latches. Verify hardware that attaches strap to frame is secure and undamaged. Replace if necessary.
- ☐ Ensure adjustable axle position camber bar is securely tightened.

⚠ CAUTION

As with any vehicle, the wheels and tires should be checked periodically for cracks and wear, and should be replaced if damaged.

- ☐ Loosen/tighten locknut if wheel wobbles noticeably or binds to a stop.
- ☐ Ensure wheel bearings are clean and free of moisture.

Inspect/Adjust Periodically

- ☐ Ensure wheelchair rolls straight (no excessive drag/pull to one side).
- ☐ Ensure wheel locks are easy to engage.
- ☐ Inspect seat and back upholstery for rips or sagging.
- ☐ Ensure adjustable axle position camber bar is securely tightened.
- ☐ Ensure no excessive side movement or binding when lifted and spun.
- ☐ Inspect handrims for signs of rough edges or peeling.
- ☐ Clean upholstery and armrests.

⚠ CAUTION

As with any vehicle, the wheels and tires should be checked periodically for cracks and wear, and should be replaced if damaged.

- ☐ Ensure wheel bearings are clean and free of moisture.

Troubleshooting

CHAIR VEERS RIGHT	CHAIR VEERS LEFT	SLUGGISH TURN OR PERFORMANCE	CASTER FLUTTERS	SQUEAK S AND RATTLES	LOOSE- NESS IN CHAIR	SOLUTIONS
X	X	X	X			Check tires for correct and equal pressure.
		X	X	X	X	Check for loose stem nuts.
				X	X	Check spokes and nipples.
X	X		X			Check that both casters contact the ground at the same time.

Maintenance

Maintenance Safety Precautions

⚠ WARNING

After ANY adjustments, repair or service and BEFORE use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.

⚠ CAUTION

DO NOT overtighten hardware attaching to the frame. This could cause damage to the frame tubing.

Suggested Maintenance Procedures

1. Before using your wheelchair, make sure all nuts and bolts are tight. Check all parts for damage or wear and replace. Check all parts for proper adjustment.
 2. Keep quick/quad-release axles free of dirt and lint to ensure positive locking and proper operation. Refer to Adjusting Quick-Release Axles on page 40 or Refer to Adjusting Quad-Release Handles on page 41 in Wheels on page 39 of this manual.
-

⚠ WARNING

DO NOT use WD-40[®], 3-in-1 oil[®], or other penetrating lubricants on quick-release axles or camber inserts. Otherwise, binding and/or damage to the wheelchair may occur.

3. Clean quick-release axles and camber inserts once (1) a week with a Teflon[®] lubricant.
-

⚠ WARNING

DO NOT use your wheelchair unless it has the proper tire pressure (p.s.i.).

DO NOT overinflate the tires. Failure to follow these suggestions may cause the tire to explode and cause bodily harm. The recommended tire pressure is on the sidewall of the tire.

4. Recommended tire pressure is listed on the sidewall of the tire.
-

⚠ CAUTION

As with any vehicle, the wheels and tires should be checked periodically for cracks and wear, and should be replaced if damaged.

5. The wheels, casters and tires should be checked periodically for cracks and wear, and should be replaced when necessary. Contact a qualified technician or Invacare customer support at the telephone numbers on the back of this manual.
-

6. Regularly check for loose spokes in the rear wheels. If loose, have them adjusted. Contact a qualified technician or Invacare customer support at the telephone numbers on the back of this manual.
7. Periodically check handrims to ensure they are secured to the rear wheels. Refer to Handrim Replacement on page 42 in Wheels on page 39 of this manual.
8. Periodically adjust wheel locks as tires wear. Refer to Wheel Lock Adjustment/Replacement on page 60 in Wheels on page 39 of this manual.
9. Periodically check caster wheel bearings to make sure they are clean and free from moisture. Use a Teflon lubricant if necessary.
10. Check upholstery for sagging, rips or tears.
11. Clean upholstery with mild soap and water.

SECTION 4—BACK

⚠ WARNING

ALWAYS perform these procedures in the presence of an assistant. The position of the footrest, camber tube, back angle, the tautness of the back upholstery as well as the user's condition are directly related to the wheelchairs stability. Any change to one (1) or any combination of the five (5) may cause the wheelchair to decrease in stability. Use **EXTREME** caution when using a new seating position. The addition of anti-tippers may be required.

After **ANY** adjustments, repair or service and **BEFORE** use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.


Unfolding/Folding the Back

NOTE: For this procedure, refer to FIGURE 4.1

⚠ WARNING

Back MUST be locked securely in place before using the wheelchair.

1. To unfold the back, lift up on the back canes and pull back towards the rear of the wheelchair until it locks into place.
2. To fold the back, pull up on the back release cord and push the back canes forward toward the front of the wheelchair.

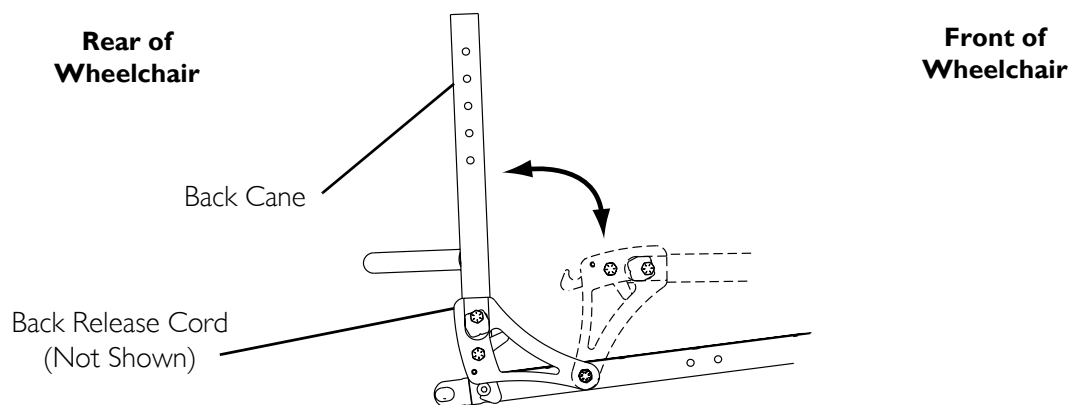

NOTE: Back upholstery removed for clarity.

FIGURE 4.1 Unfolding/Folding the Back

Back Angle Adjustment

NOTE: For this procedure, refer to FIGURE 4.2

NOTE: Perform this procedure on both sides of the wheelchair at the same time.

1. Loosen, but DO NOT remove the locknuts and hex screws that secure the back angle bracket to the seat rail and the back cane.
2. Loosen the TOP locknut and slide the TOP hex screw away from the back angle bracket to adjust the cam.
3. Adjust back canes to back angle required.
4. Adjust cam to achieve desired position.

NOTE: An indexing notch has been put on the cam to help determine cam position for desired back angle adjustment.

5. Secure cam in desired position. Torque all hex screws and locknuts to 960-1020 inch pounds (80-85 foot-pounds).

NOTE: As shown in FIGURE 4.2, the adjustment cam can be rotated to several different positions thus changing the overall back angle relative to the seat rail.

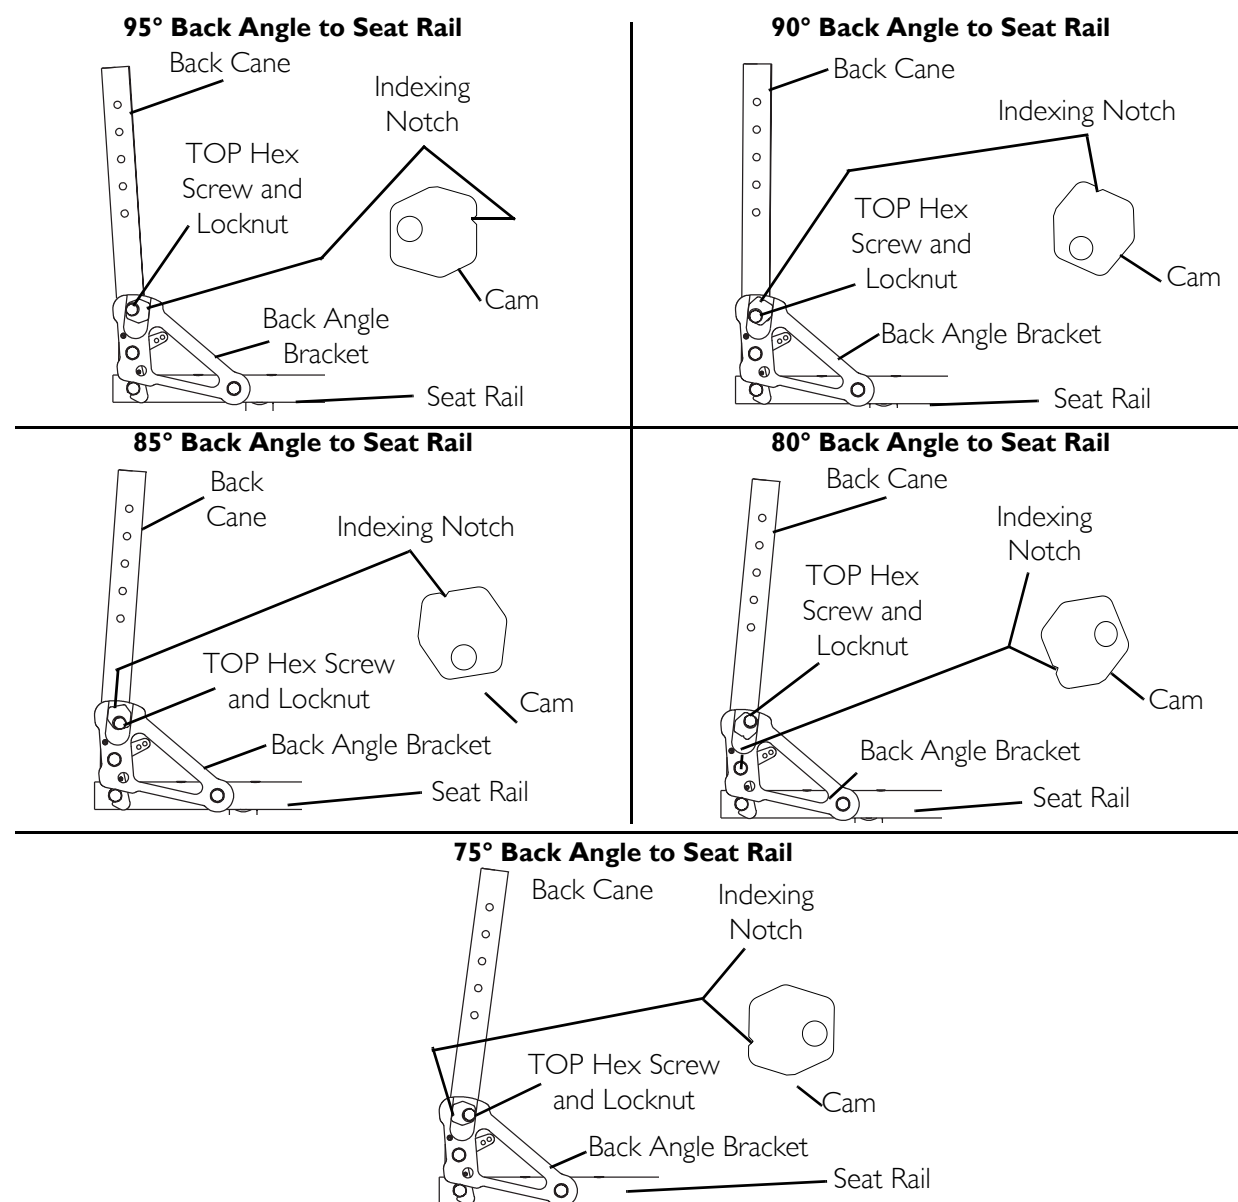


FIGURE 4.2 Back Angle Adjustment

Adjusting/Replacing Back Upholstery

NOTE: For this procedure, refer to FIGURE 4.3.

Top End Back Upholstery

⚠ WARNING

The back flaps and center upholstery MUST be replaced if hook and loop fastener is worn or DOES NOT secure the flaps to the back center upholstery. If hook and loop fastener is NOT secure, serious injury may occur.

Adjusting Top End Back Upholstery

1. Unlatch the two (2) fastening flaps that secure the top of the back upholstery to the back canes.
2. Align the top of the back upholstery with the fastening flaps ensuring the top of the back upholstery is even with the top of the back canes.
3. Adjust to the desired tautness:
 - Tighter - Back upholstery will increase the stability and maintain normal maneuverability of the wheelchair because the user is pushed forward in the wheelchair slightly.
 - Looser - Back upholstery will increase the maneuverability and make the wheelchair more tippy because additional weight is being distributed onto the rear wheels.
4. Securely latch back upholstery to the fastening flaps.

Replacing Top End Back Upholstery

1. Unlatch the two (2) fastening flaps that secure the top of the back upholstery to the back canes.
2. Remove the fastening flaps from the back canes by lifting straight up.
3. Remove the seat cushion.
4. Separate the bottom of the back upholstery from either the underside or top of the seat upholstery (depending on back style).
5. Install the NEW fastening flaps onto the back canes.

NOTE: The fastening flap with logo is for the left back cane.

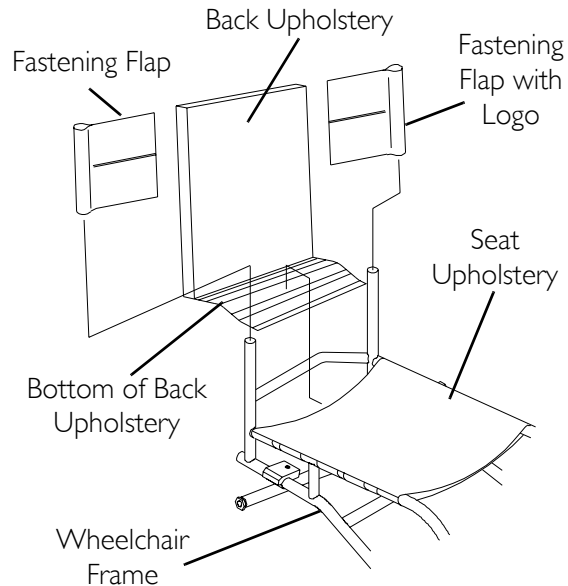


FIGURE 4.3 Adjusting/Replacing Back Upholstery - Top End Back Upholstery

NOTE: Right and left is determined by sitting in the wheelchair.

- Securely latch the bottom of the back upholstery to the fasteners on either the underside or top of the seat upholstery (depending on back style).
- Adjust the NEW back upholstery to the desired tautness. Refer to Adjusting Top End Back Upholstery on page 31 in this section of the manual.

Removing/Installing Foldover Back Upholstery

NOTE: For this procedure, refer to FIGURE 4.4.

⚠ WARNING

The position of the footrest, seat angle, back angle, seating system/upholstery, caster size and position, rear wheel size and position, use of anti-tippers, as well as the user condition directly relate to the stability of the wheelchair. Any change to one (1) or any combination of the ten (10) may cause the wheelchair to decrease in stability. EXTREME care MUST be taken when changing the stability of the wheelchair. Refer to the chart in General Guidelines on page 15 of this manual.

Removing Foldover Back Upholstery

- Unfasten the two (2) fastening flaps that secure the bottom of the existing back upholstery to the back canes.
- Unfold the top of the back upholstery.
- Lift up on the existing back upholstery and remove from the wheelchair.

Installing Foldover Back Upholstery

- Install the new back upholstery onto the back canes.
- Wrap the end of a fastening flap around the back cane.
- Insert the end of the fastening flap through the loop.
- Wrap the fastening flap around the back cane again and press firmly to secure.
- Fold the top of the back upholstery down over the back canes towards the front of the wheelchair.
- Press firmly to secure the fastening strips.

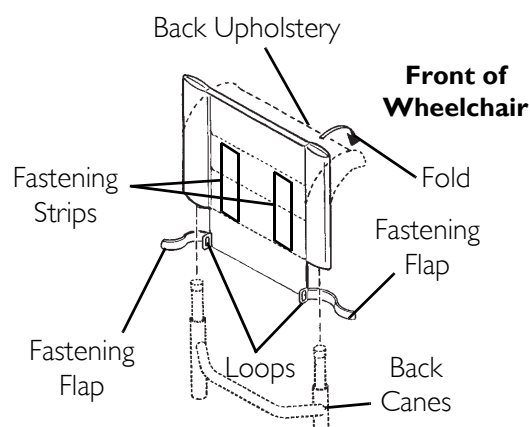


FIGURE 4.4 Removing/Installing Foldover Back Upholstery

Custom Manual Adjustable Tension Back Upholstery

NOTE: For this procedure, refer to FIGURE 4.5.

The Adjustable Tension Straps

The straps can be adjusted at various levels of tension to accommodate individual end-users. The bottom two (2) straps can be adjusted tightly to support and/or assist the extensor muscles.

The Back Upholstery Cover

The back upholstery cover is designed for three (3) reasons:

1. The first is as a modesty cover.
2. The second is to keep the cushion from sliding out of the back of the wheelchair.
3. The third is a sacral support depending upon how far or tight the flap is pulled under the seat cushion

Replacing Adjustable Tension Back Upholstery

1. Remove the back height adjustment screws that secure the back canes to the back uprights.
2. Slide the back canes out of the back uprights.
3. Remove the two (2) screws and washers that secure the EXISTING back upholstery to the back canes.
4. Slide the EXISTING back upholstery down and off the back canes.
5. Stand behind the wheelchair and perform the following:
 - A. Slide anchor loop section of adjustable tension back upholstery up onto the LEFT back cane with the upper grommet hole facing the rear of the wheelchair.
 - B. Slide adjuster strap section of adjustable tension back upholstery up onto the RIGHT back cane with the upper grommet hole facing the rear of the wheelchair.
6. Align the mounting hole in each back cane with the desired mounting hole in each back upright.

NOTE: Both back canes should be adjusted to the same height.

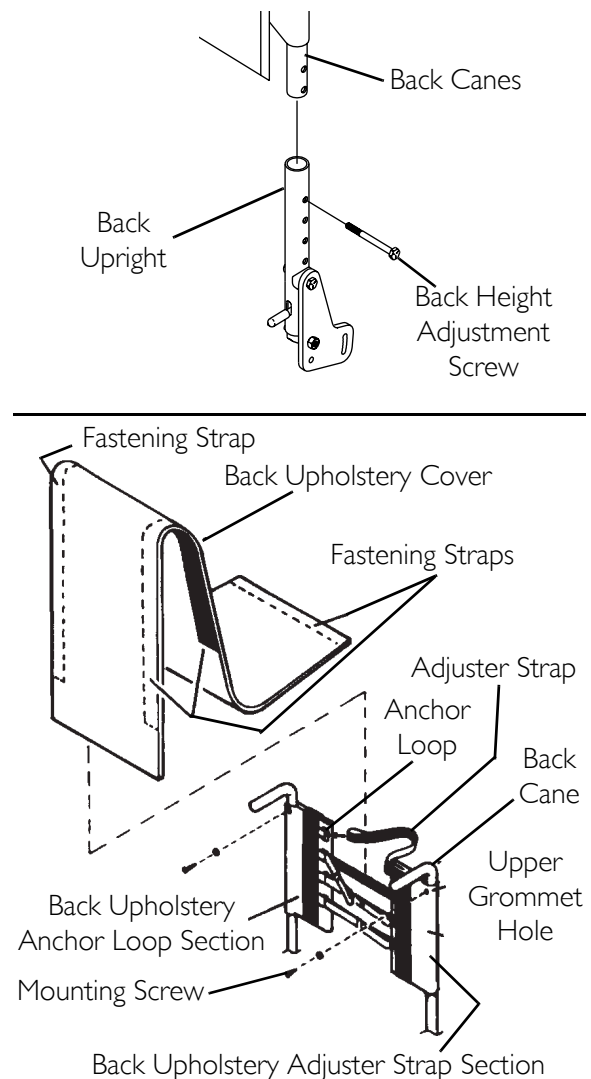


FIGURE 4.5 Adjusting/Replacing Back Upholstery - Custom Manual Adjustable Tension Back Upholstery

7. Install the two (2) back height adjustment screws through the back upright mounting holes determined in STEP 6 and the back cane mounting holes.
8. Slip adjuster straps through corresponding anchor loops and adjust the back upholstery. Secure with the fastening straps.

⚠ WARNING

After the adjustable tension back upholstery has been positioned to the end-users individual needs, the fastening straps **MUST be securely fastened **BEFORE** applying the back upholstery cover. The adjustable back should be checked whenever entering the wheelchair to ensure that the fastening straps are securely fastened.**

9. Secure the back upholstery cover (fastening strap) to the back of the adjustable back upholstery (fastening strap).
10. Flip the back upholstery cover over the adjustable back upholstery and secure the fastening straps to the front of the adjustable back upholstery.
11. Lay the front portion of the back upholstery cover on the seat pan.
12. Adjust the slack in the back upholstery cover and then secure to the seat pan fastening straps.

Back Height Adjustment (Adjustable Backs Only)

NOTE: For this procedure, refer to FIGURE 4.6

NOTE: Observe the tautness of the back upholstery for reinstallation.

1. Unlatch the two (2) fastening flaps that secure the top of the back upholstery to the back canes and remove from the back canes.

⚠ WARNING

Push pin **MUST be protruding through hole in back cane.**

Ensure that both back cane inserts are at the same height **BEFORE reassembling the wheelchair.**

2. Press the push pin on the back cane insert tube in and adjust the back height to one (1) of four (4) heights depending on original back height:

ORIGINAL BACK HEIGHT (IN INCHES)	11 - 15	14 - 18	16 - 20
Hole* Number			
1	11	14	16
2	12	15	17
3	13	16	18
4	14	17	19
**	15	18	20

*NOTE: Holes numbered from bottom to top for reference only. (There are no numbers on the back canes.)

**NOTE: There is a 1-inch adjustment pin on the back cane insert tube. To raise back to maximum height, first make adjustment to the back cane inserts.

3. Reinstall the fastening flaps onto the back canes.

NOTE: The fastening flap with logo is for the left back cane.

NOTE: Right and left is determined by sitting in the wheelchair.

4. Adjust the NEW back upholstery to the desired tautness. Refer to Adjusting/Replacing Back Upholstery on page 31 in this section of the manual.

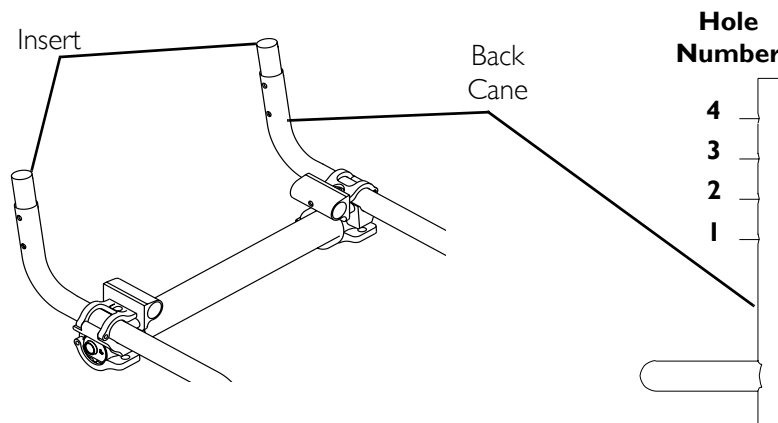


FIGURE 4.6 Back Height Adjustment (Adjustable Backs Only)

SECTION 5—SEAT

⚠ WARNING

After **ANY** adjustments, repair or service and **BEFORE** use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.

Replacing Top End Seat Upholstery

NOTE: For this procedure, refer to FIGURE 5.1.

⚠ WARNING

The seat upholstery and/or cushion **MUST** be cleaned regularly and/or replaced if incontinence is frequent. The risk of pressure sores is significantly higher with seat upholstery that is wet and/or soiled.

1. Remove the seat cushion and back upholstery from the wheelchair.
2. Place the wheelchair onto its two (2) rear wheels.
3. Unlatch the five (5) fastening flaps that secure the seat upholstery to the wheelchair frame.
4. Remove the existing seat upholstery.
5. Place the wheelchair back onto all four (4) wheels.
6. Install the NEW seat upholstery making sure the five (5) fastening flaps hang over the right and left sides of the wheelchair frame.

NOTE: The seat upholstery MUST be positioned with the three (3) double-sided fastening flaps towards the rear of the wheelchair for proper installation of the back upholstery.

NOTE: Make sure the rear retaining flap is BETWEEN the wheelchair frame and the back cane support brackets (adjustable backs only).

NOTE: Right and left is determined by sitting in the wheelchair.

7. Insert the front fastening flaps through the slots on the right and left sides on the underside of the wheelchair frame and securely latch together.
8. Place the wheelchair onto its two (2) rear wheels.
9. Securely latch the four (4) remaining fastening flaps together.

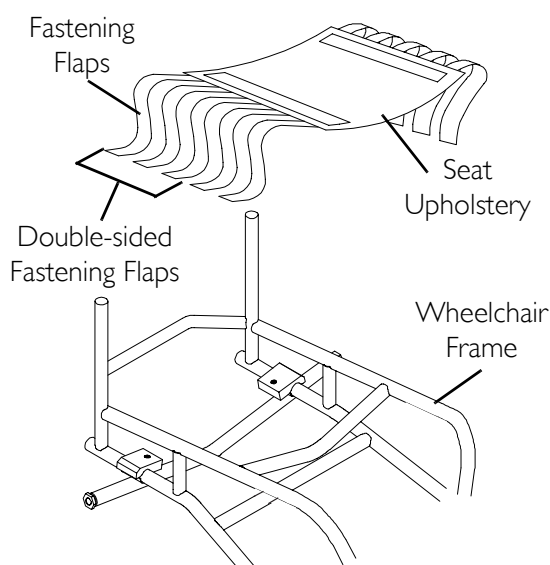


FIGURE 5.1 Replacing Top End Seat Upholstery

Replacing Custom Manual Screw-On Seat Upholstery

NOTE: For this procedure, refer to FIGURE 5.2.

1. Remove the seat cushion from the wheelchair.
2. Remove the twelve (12) phillips screws that secure the existing seat upholstery to the seat frame.
3. Remove the existing seat upholstery.

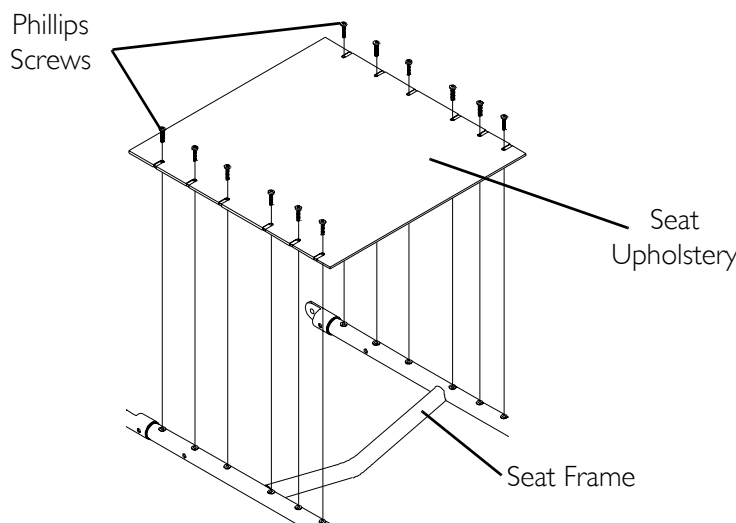


FIGURE 5.2 Replacing Custom Manual Screw-On Seat Upholstery

Transformer Seat Height Adjustment

NOTE: For this procedure, refer to FIGURE 5.3

Front Seat Height Adjustment

1. Note the order of the mounting screw, coved washers, spacer, half clamps and mounting screw/threaded sleeve and their position on the wheelchair frame and footrest tubing. Refer to DETAIL "A" in FIGURE 5.3.
2. Remove the mounting screw, coved washers, spacer, half clamps and mounting screw/threaded sleeve on both sides of the wheelchair.

NOTE: The footrest tubing will slide once the hardware is removed.

3. Raise/lower the front of the seat to the desired position.
4. Adjust the footrest height if desired. Refer to Adjusting the X-terminator and Transformer Footrests on page 65 in Footrest/ Anti-Tipper on page 62 of this manual.
5. Align the footrest tubing adjustment holes with the desired wheelchair frame adjustment holes.
6. Install the hardware removed in STEP 2 through the adjustment holes aligned in STEP 5.
7. Securely tighten all hardware.

Rear Seat Height Adjustment

1. Loosen the two (2) mounting screws on both sides of the front of the wheelchair. Refer to DETAIL "A" in FIGURE 5.3.
2. Loosen the four (4) adjustment screws on both sides of the rear of the wheelchair. Refer to DETAIL "B" in FIGURE 5.3.
3. Adjust seat higher or lower to desired position. Use a tape measure or ruler to ensure that both sides are the same height.
4. Securely tighten the four (4) adjustment screws at the rear of the wheelchair and the two (2) mounting screws at the front of the wheelchair.

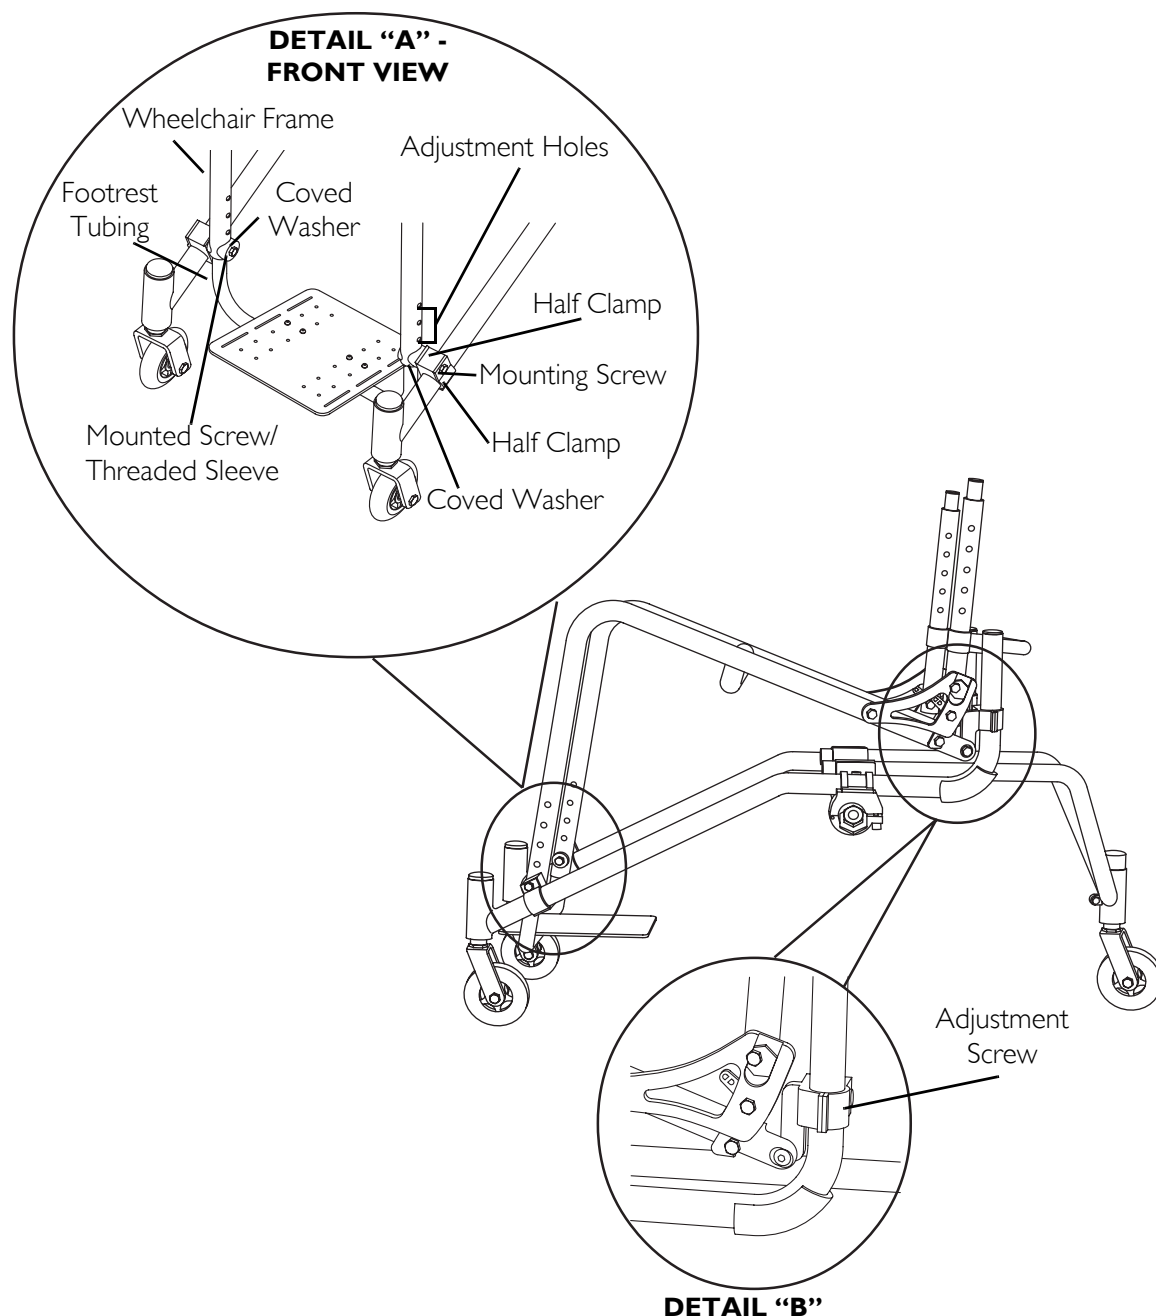


FIGURE 5.3 Transformer Seat Height Adjustment

SECTION 6—WHEELS

⚠ WARNING

After **ANY** adjustments, repair or service and **BEFORE** use, make sure all attaching hardware is tightened securely - otherwise injury or damage may result.

Removing/Installing Rear Wheels

NOTE: For this procedure, refer to FIGURE 6.1.

⚠ CAUTION

Changing the size of the rear wheels can affect the performance of the wheelchair. Contact Invacare at the telephone numbers on the back of this manual **BEFORE** changing rear wheel size.


1. Perform one (1) of the following:
 - Quick-Release - Push in the tip of the quick-release axle and pull axle and wheel away from the wheelchair.
 - Quad-Release - Lift UP on the handle of the quad-release axle and pull axle and wheel away from the wheelchair.
2. Repeat STEP 1 for the opposite rear wheel.
3. Reinstall the rear wheels onto the wheelchair by reversing STEPS 1-2.

⚠ WARNING

Pull on the rear wheel to make sure the detent pin and locking pins of the quick/quad-release axle are fully released **BEFORE operating wheelchair.**

Keep locking pins clean.

4. If there is too much movement of the rear wheel assembly in a back and forth motion, refer to Adjusting Quick-Release Axles on page 40 or Adjusting Quad-Release Handles on page 41 in this section of the manual.

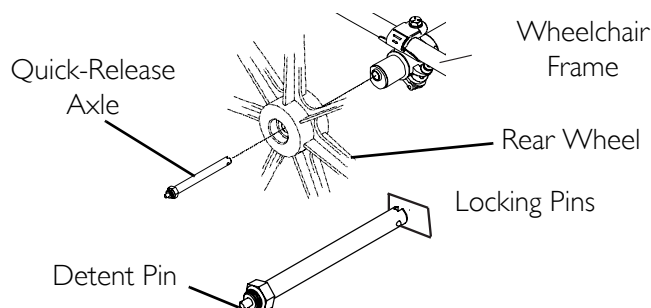

NOTE: Quad-Release Axle not shown. Locking pins are the same as Quick-Release Axle.

FIGURE 6.1 Removing/Installing Rear Wheels

Adjusting Quick-Release Axles

NOTE: For this procedure, refer to FIGURE 6.2.

1. Remove rear wheel and quick-release axle from the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
2. Depress detent pin in the quick-release axle and slide axle through the wheel hub.
3. Release detent pin ensuring that the locking pins are fully released.
4. Increase or decrease end play by adjusting the locknut on the end of the quick-release axle.
5. Reinstall rear wheel onto the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.

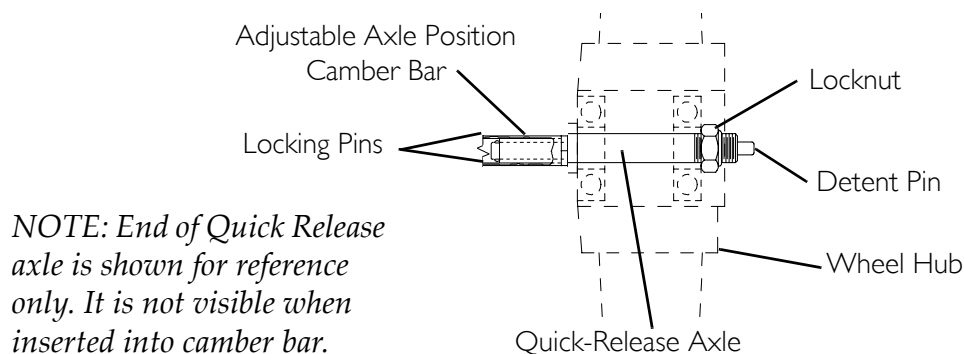


FIGURE 6.2 Adjusting Quick-Release Axles

Installing Quad-Release Axles

NOTE: For this procedure, refer to FIGURE 6.3.

1. Remove rear wheel and the existing quick-release axle from the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
2. Remove existing quick-release axle from rear wheel.
3. Insert new quad-release axle through rear wheel hub.
4. Slide locking collar onto quad-release axle until it is snug against rear wheel and tighten securely with allen screw.
5. Reinstall rear wheel and the quad-release axle onto the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
6. Flip the handle of the quad-release axle down to release the detent pin ensuring that the locking pins are fully released.

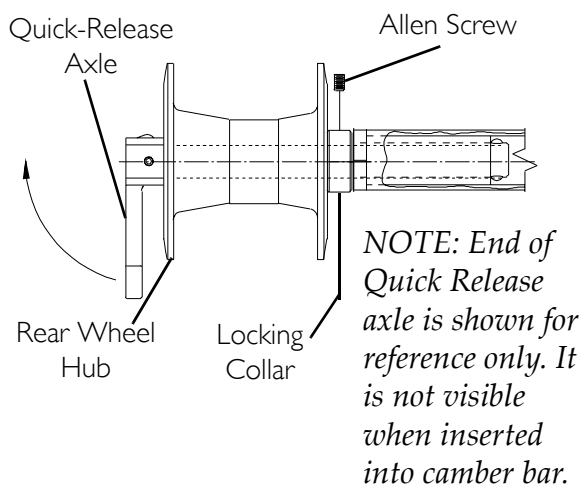


FIGURE 6.3 Installing Quad-Release Axles

7. If detent pin does not fully release, proceed to [Adjusting Quad-Release Handles](#) on page 41 in this section of the manual.
8. Repeat STEPS 1-7 for the opposite rear wheel.

Adjusting Quad-Release Handles

NOTE: For this procedure, refer to FIGURE 6.4.

In and/or Out

1. Remove rear wheel and the quad-release axle from the wheelchair. Refer to [Removing/Installing Rear Wheels](#) on page 39 in this section of the manual.
2. Loosen the locking screw.
3. Make one or both of the following adjustments:
 - If the quad-release handle is not releasing the locking pins completely, rotate the quad-release handle approximately one-quarter ($\frac{1}{4}$) turn clockwise.
 - If the quad-release handle hits the spokes of the rear wheel when assembled, rotate the quad-release handle approximately one-quarter ($\frac{1}{4}$) turn counterclockwise.

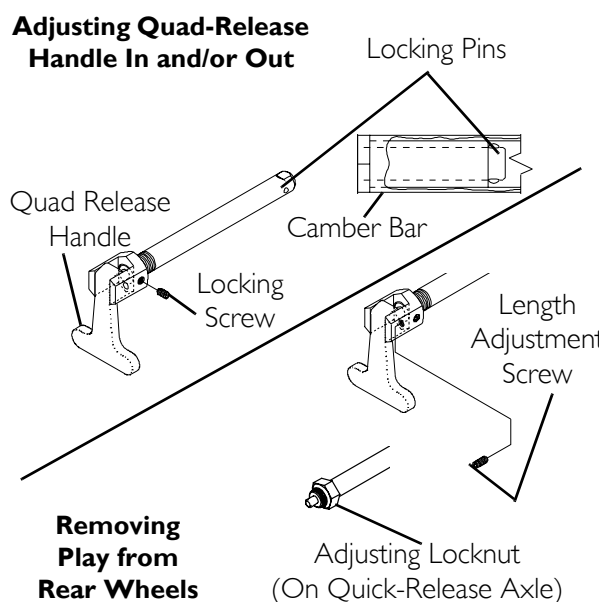


FIGURE 6.4 Adjusting Quad-Release Handles

4. Tighten the locking screw.
5. Reinstall the rear wheel and quad-release axle onto the wheelchair. Refer to [Removing/Installing Rear Wheels](#) on page 39 in this section of the manual.
6. Flip the handle of the quad-release axle down to release the detent pin ensuring that the locking pins are fully released.
7. Repeat the above procedures until the quad-release axle locks correctly.

Removing Play from Rear Wheels

NOTE: The adjusting locknut on the quick-release axles originally performed this function.

1. With the rear wheel and quad-release axle still mounted onto the wheelchair, make the following adjustment:
 - Tighten the length adjusting screw until there is no in and out movement of the quad-release axle and rear wheel.

Handrim Replacement

NOTE: For this procedure, refer to FIGURE 6.5.

1. Remove the rear wheel from the wheelchair. Refer to Removing/Installing Rear Wheels on page 39.

⚠ WARNING

Tire MUST be FULLY deflated BEFORE any disassembly procedures are performed. Otherwise injury or damage may result.

2. Remove all air from the tube by pressing down on the pin in the center of the valve stem.
3. While carefully holding the tire, tube and rim strip to one side, hold the allen screws and remove the locknuts that secure the handrim to the rear wheel.
4. Remove the EXISTING handrim.
5. Install NEW handrim by reversing STEPS 2-4.

⚠ WARNING

DO NOT inflate tire until it is completely assembled. Otherwise injury or damage may result.

6. Inflate tire to correct psi rating on the sidewall of tire.
7. Reinstall rear wheel to the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
8. Repeat STEPS 1-7 for opposite rear wheel if necessary.

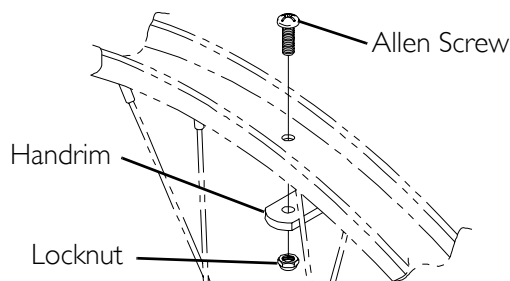


FIGURE 6.5 Handrim Replacement

Repairing/Replacing Rear Wheel, Tire/Tube

⚠ WARNING

Replacement of the tire or tube MUST be performed by a qualified technician.

⚠ CAUTION

Changing the size of the rear wheels can affect the performance of the wheelchair. Contact Invacare at the numbers on the back cover BEFORE performing this procedure.

NOTE: If replacing rear wheels with a different size than what was originally on the wheelchair, the front caster height must also be changed to keep the wheelchair frame parallel to the floor. Refer to Adjusting Front Caster Height on page 60 in this section of the manual ONLY after contacting Invacare. Anti-tipper height (if applicable) must also be adjusted to maintain 1-1/2 to 2-inch clearance between bottom of the anti-tipper wheels and the floor. Refer to Anti-tipper Adjustment/Replacement on page 66 in Footrest/ Anti-Tipper on page 62 of this manual.

Opening/Closing Camber Clamps

NOTE: For this procedure, refer to FIGURE 6.6.

WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are in the **CLOSED** position **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.


STANDARD AND SUSPENSION CAMBER CLAMPS - Make sure the hex screws are securely tightened **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

CAUTION


A4 CAMBER SYSTEM ONLY - **DO NOT** close the quick-release levers or tighten the socket screws or hex screws without camber inserts in the axle tube. Damage to the axle tube will occur.

1. Perform one (1) of the following to open a camber clamp:
 - A. Quick Release Levers - Pull the quick release lever to the open position.
 - B. Standard Camber Clamps - Loosen, but do not remove the socket screw on the camber clamp.
 - C. Suspension Camber Clamps - Loosen, but do not remove the hex screw on the bottom rear of the camber clamp.
2. Perform one (1) of the following to close a camber clamp:
 - A. Quick Release Levers - Secure the quick release lever to the camber clamp by threading it completely into the camber clamp. Push the quick release lever on the camber clamps to the closed position.
 - B. Standard Camber Clamps - Securely tighten the socket screw to secure the axle tube.
 - C. Suspension Camber Clamp - Securely tighten the hex screw on the bottom rear of the camber clamp to secure the axle tube.

Side View of Quick Release Lever

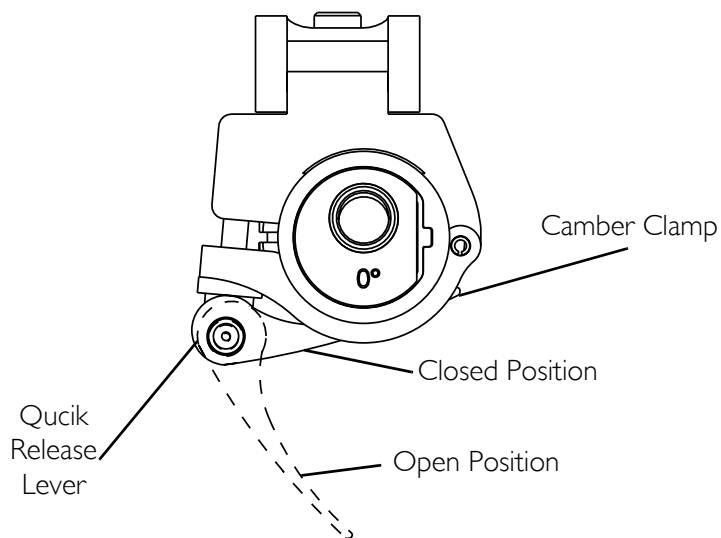

Side View of Standard Camber Clamp

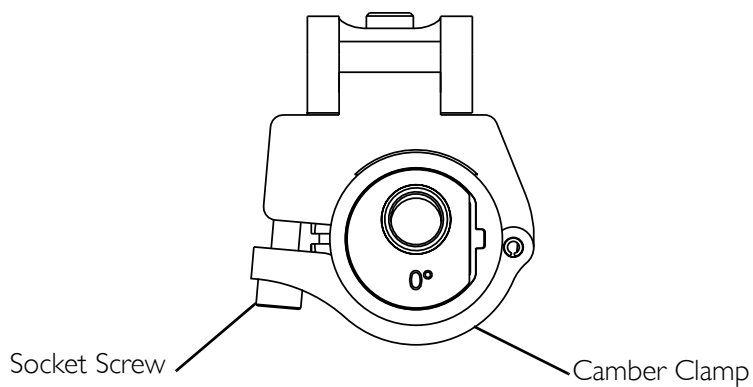

Rear View of Suspension Camber Clamp

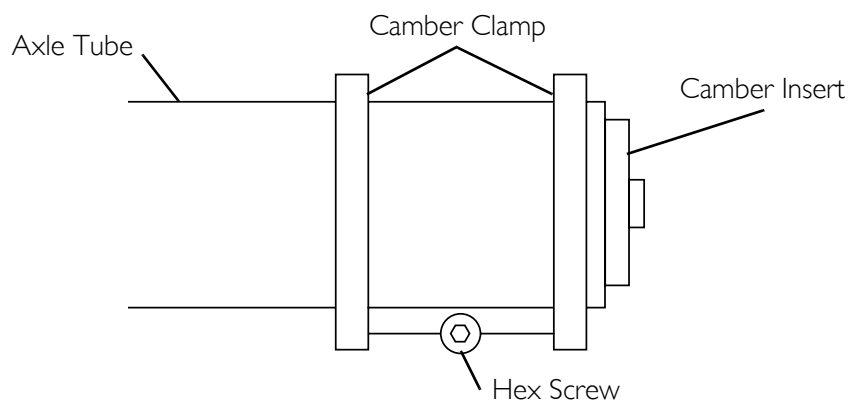


FIGURE 6.6 Opening/Closing Camber Clamps

Adjusting Rear Wheel Camber

NOTE: For this procedure, refer to FIGURE 6.7.

Camber Tube 2000

The axle tube must be replaced to change the camber. Refer to Replacing Axle Tube on page 53 in this section of the manual.

A4 Camber System

NOTE: Perform this procedure to one (1) side of the wheelchair at a time for ease of adjustment.

1. Open the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
2. Pull one (1) rear wheel with camber insert out of axle tube.
3. Remove the rear wheel from the camber insert.
4. Rotate the camber insert 180°.
5. Reinstall the rear wheel into the camber insert.

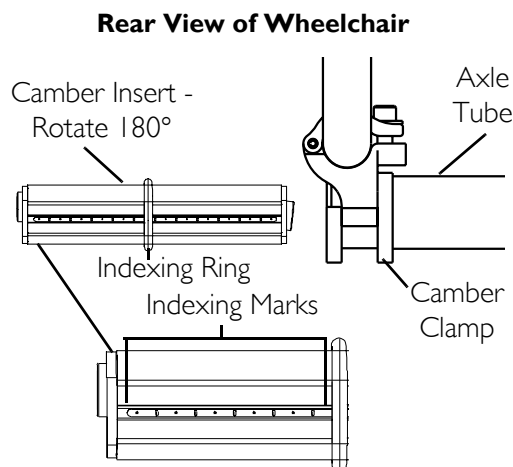


FIGURE 6.7 Adjusting Rear Wheel Camber - A4 Camber System

⚠ WARNING

NEVER position the camber inserts in the axle tube with more than 3-inches (12 indexing marks showing) of the camber insert outside of the axle tube. The camber inserts will not be securely tightened in the axle tube. Possible injury to the user and/or damage to the wheelchair may occur.

6. Position the camber insert to the desired position. Make sure there is no more than 3-inches (12 indexing marks) of the camber inserts outside of the axle tube.
7. Slide the indexing ring on the camber insert until it is flush with the camber clamp.

NOTE: Before using the wheelchair, make sure both camber inserts are set to the same indexing mark. This will make sure the distance between the rear wheel and the wheelchair is the same on both sides.

⚠ WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are pointing towards the rear of the wheelchair and are in the **CLOSED** position **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

⚠ WARNING

STANDARD AND SUSPENSION CAMBER CLAMPS - Make sure the hex screws are securely tightened **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

8. Close the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
9. Repeat STEPS 1-8 for opposite side of wheelchair.
10. Reinstall rear wheel to the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
11. Adjust toe in/toe out of wheelchair. Refer to Adjusting Toe In/Toe Out on page 47 in this section of the manual.

Determining Toe In/Toe Out

NOTE: For this procedure, refer to FIGURE 6.8 and FIGURE 6.9.

1. Inflate all pneumatic tires to recommended tire pressures (listed on the sidewall of the tire).
2. Measure the distance between the centerlines at the rear and front of the rear wheels at approximately 12-inches from the ground/floor (FIGURE 6.8).

NOTE: For optimum accuracy, perform STEP 2 with the wheelchair occupied.

3. Determine difference between two (2) measurements. If difference between the two (2) measurements is greater than 1/2-inch (0 + 1/4-inch for maximum rollability), one (1) of two (2) conditions exists:
 - A. If the back centerline measurement of the rear wheels is **SMALLER** than the front centerline measurement of the rear wheels, a **TOE-OUT** condition exists (FIGURE 6.9).
 - B. If the back centerline measurement of the rear wheels is **LARGER** than the front centerline measurement of the rear wheels, a **TOE-IN** condition exists (FIGURE 6.9).
4. If the difference between the measurements is greater than 1/2-inch, correct the toe-in/toe-out condition. Refer to Adjusting Toe In/Toe Out on page 47 in this section of the manual.

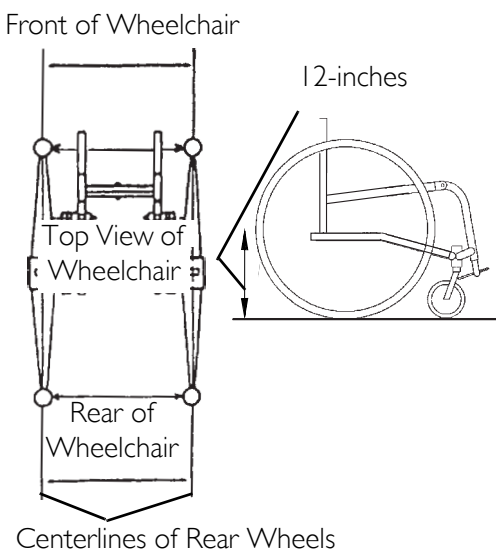


FIGURE 6.8 Determining Toe In/Toe Out - Measuring Centerlines of Rear Wheels

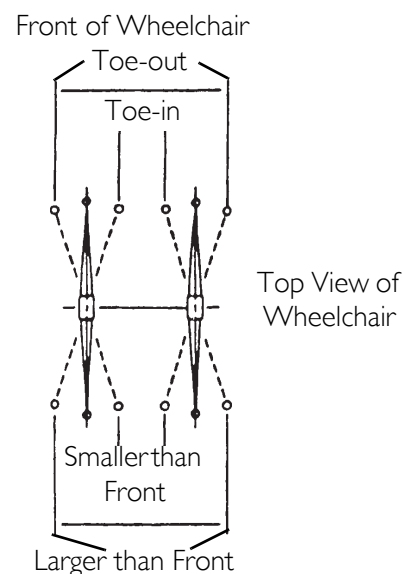


FIGURE 6.9 Determining Toe In/Toe Out - Comparing Centerline Measurements of Rear Wheels

Adjusting Toe In/Toe Out

NOTE: For this procedure, refer to FIGURE 6.10.

Camber Tube 2000

1. Open the camber clamps. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
2. Slowly rotate the camber tube in either direction until the rear wheels are approximately in a straight line.
3. Close the camber clamps. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
4. Measure the distance between the center lines at the rear and front of the rear wheels at approximately 12-inches from the ground/floor. Refer to Determining Toe In/Toe Out on page 46 in this section of the manual.
5. Repeat STEPS 1-4 until the toe in/toe out measurement is less than 1/2-inch ($0 \pm 1/4$ -inch for maximum rollability).

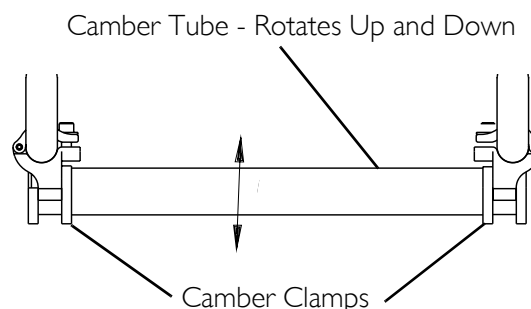


FIGURE 6.10 Adjusting Toe In/Toe Out -Camber Tube 2000

A4 Camber System

Course Adjustment.

NOTE: For this procedure, refer to FIGURE 6.11.

NOTE: This procedure is required any time the axle tube is moved from the factory set position or is replaced.

NOTE: Make the following adjustment for one (1) camber at a time.

1. Open the camber clamps. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
2. Loosen the phillips screws that secure the adjustment rings to the axle tube.
3. Slowly rotate the axle tube until the rear wheels are approximately in a straight line.

⚠ WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are pointing towards the rear of the wheelchair and are in the CLOSED position BEFORE using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.


⚠ WARNING

STANDARD AND SUSPENSION CAMBER CLAMPS - Make sure the hex screws are securely tightened BEFORE using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

4. Close the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
5. Measure the distance between the center lines at the rear and front of the rear wheels at approximately 12-inches from the ground/floor. Refer to Determining Toe In/Toe Out on page 46 in this section of the manual.
6. Repeat STEPS 1-4 until the toe in/toe out measurement is less than 1/2-inch ($0 \pm 1/4$ -inch for maximum rollability).
7. Rotate either the right or left adjustment ring until the stop on the ring is at the top of the slot in the camber clamp as shown in FIGURE 6.11 and securely tighten the phillips screw on the positioned adjustment ring.

NOTE: Rear wheels are removed from the drawings for clarity. There is no need to remove rear wheels from the wheelchair during adjustment.

NOTE: Below are two (2) examples of how the adjustment rings can be positioned.

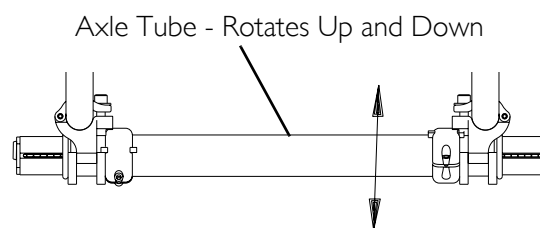

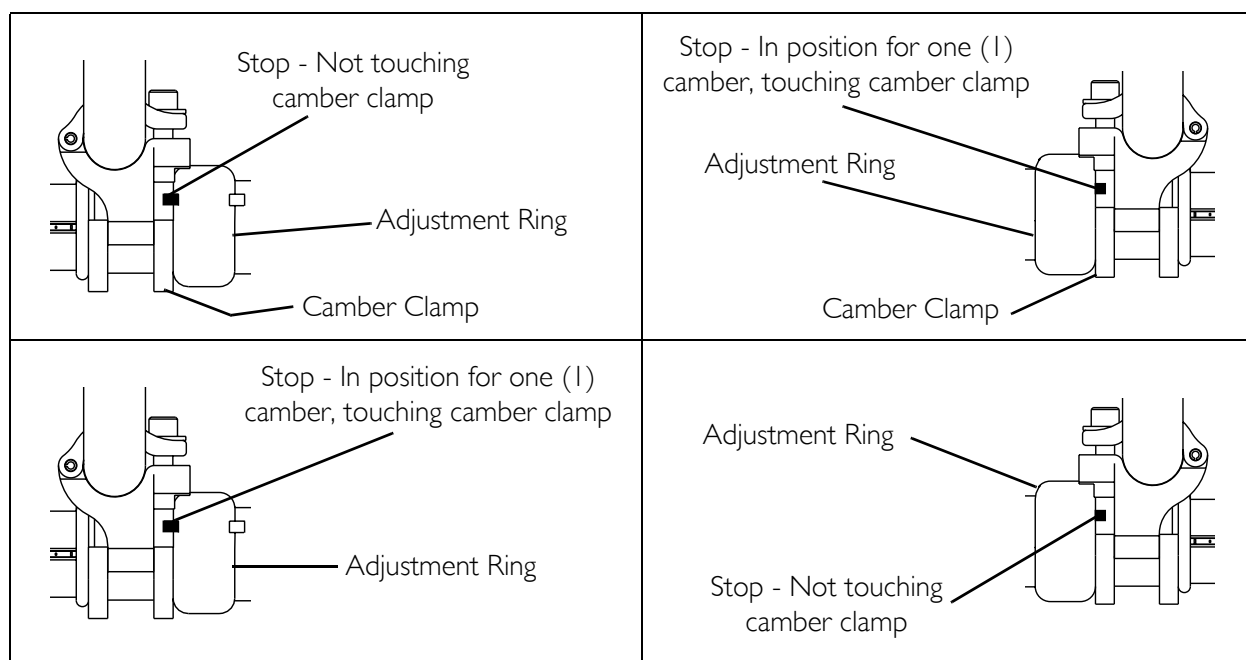


FIGURE 6.11 Adjusting Toe In/Toe Out - A4 Camber System - Course Adjustment.

NOTE: DO NOT tighten the phillips screw on the other adjustment ring at this time.

NOTE: Repeat STEPS 1-7 of this procedure for the other adjustment ring AFTER repositioning the camber insert. Refer to Adjusting Rear Wheel Camber on page 45 in this section of the manual.

*NOTE: When positioning the other adjustment ring, rotate the ring until the stop is at the bottom of the slot in the camber clamp. The right and left stops **MUST** be positioned opposite of each other or Fine Adjustment on page 49 in this section of the manual will not work correctly.*

NOTE: When the left adjustment ring is adjusted to a camber, the right adjustment ring will not touch the camber clamp and when the right adjustment ring is adjusted to the other camber the left adjustment ring will not touch the camber clamp.

Fine Adjustment

NOTE: For this procedure, refer to FIGURE 6.12.

NOTE: This adjustment is required any time the camber insert is repositioned.

1. Open the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
2. Slowly rotate the axle tube until the stop on the opposite adjustment ring is positioned at the opposite end of the camber clamp.

⚠ WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are pointing towards the rear of the wheelchair and are in the **CLOSED position **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.**

⚠ WARNING

STANDARD AND SUSPENSION CAMBER CLAMPS - Make sure the hex screws are securely tightened **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

3. Close the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.

NOTE: Rear wheels are removed from the drawings for clarity, there is no need to remove rear wheels from the wheelchair during adjustment.

NOTE: Below is one (1) example of how the adjustment rings can be positioned.

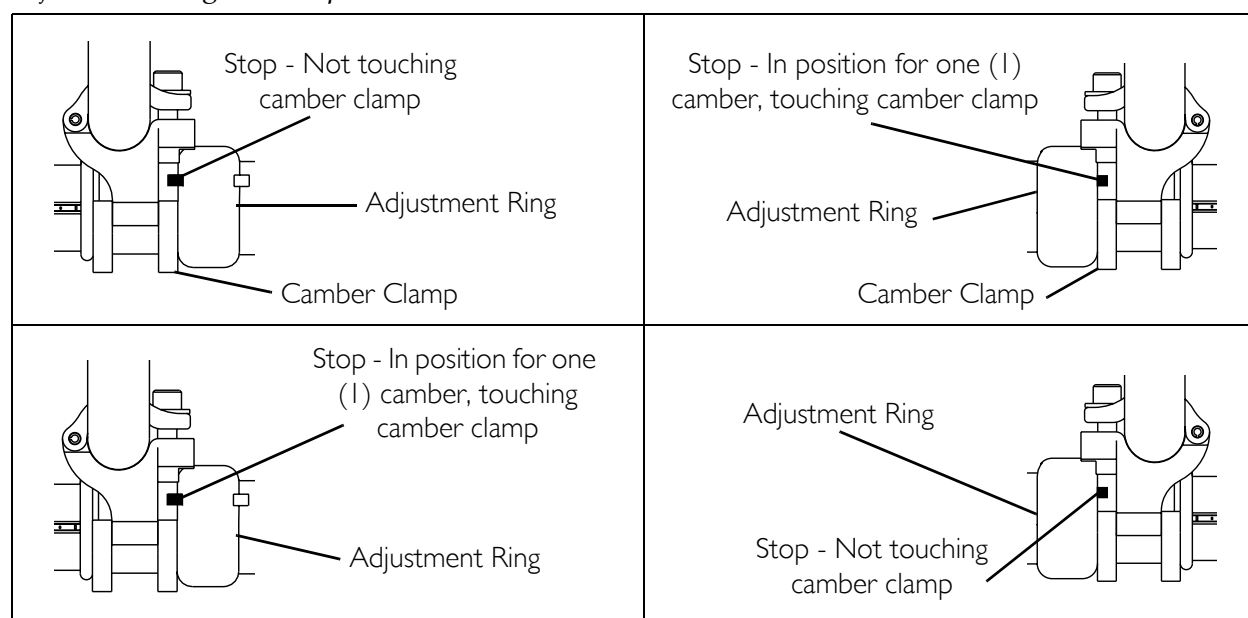
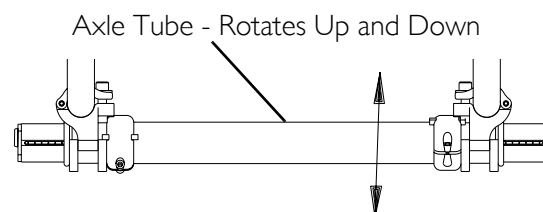


FIGURE 6.12 Adjusting Toe In/Toe Out - A4 Camber System- Fine Adjustment

Adjusting Wheelbase Length (Adjusting Center of Gravity)

NOTE: For this procedure, refer to FIGURE 6.13.

⚠ WARNING

ALWAYS perform this procedure in the presence of an assistant. The position of the footrest, camber tube, back angle, the tautness of the back upholstery as well as the user's condition are directly related to the wheelchairs stability. Any change to one (1) or any combination of the five (5) may cause the wheelchair to decrease in stability. Use **EXTREME** caution when using a new seating position. The addition of anti-tippers may be required.

NOTE: The camber bar is always mounted to the BOTTOM of the wheelchair frame.

1. Perform one (1) of the following:
 - Non-Suspension - Loosen, but do not remove the hex screw that secures each of the top clamps to the wheelchair frame.
 - Suspension - Loosen, but do not remove the two (2) hex screws that secure each of the top clamps to the wheelchair frame.
2. Position the camber clamps on the wheelchair frame at the desired position.
 - Lengthing the Wheelbase - Will increase the stability and maintain standard maneuverability of the wheelchair.
 - Shortening the Wheelbase - Will decrease the stability, increase the maneuverability and distribute additional weight onto the rear wheels.

NOTE: Wheelchair performance will be affected if the camber clamps do not sit flush on the wheelchair frame.

3. Perform one (1) of the following:
 - A. Non-Suspension - Securely tighten the hex screw that secures one (1) of the top clamps to the wheelchair frame.
 - B. Suspension - Securely tighten the two (2) hex screws that secure one (1) of the the top clamps to the wheelchair frame.

NOTE: Securely tightening one (1) hex screw at a time ensures that the camber clamps will sit flush on the wheelchair frame.

4. Repeat STEP 3 for opposite side of the wheelchair.

NOTE: The distance between the back post and the back of the top clamp on each side of the wheelchair can be measured as an additional check to make sure the camber clamps sit flush on the wheelchair frame (the measurements should be the same).

5. Roll the wheelchair before using to make sure there is no excessive drag to either side.

NOTE: If drag to either side occurs, refer to Determining Toe In/Toe Out on page 46 in this section of the manual.

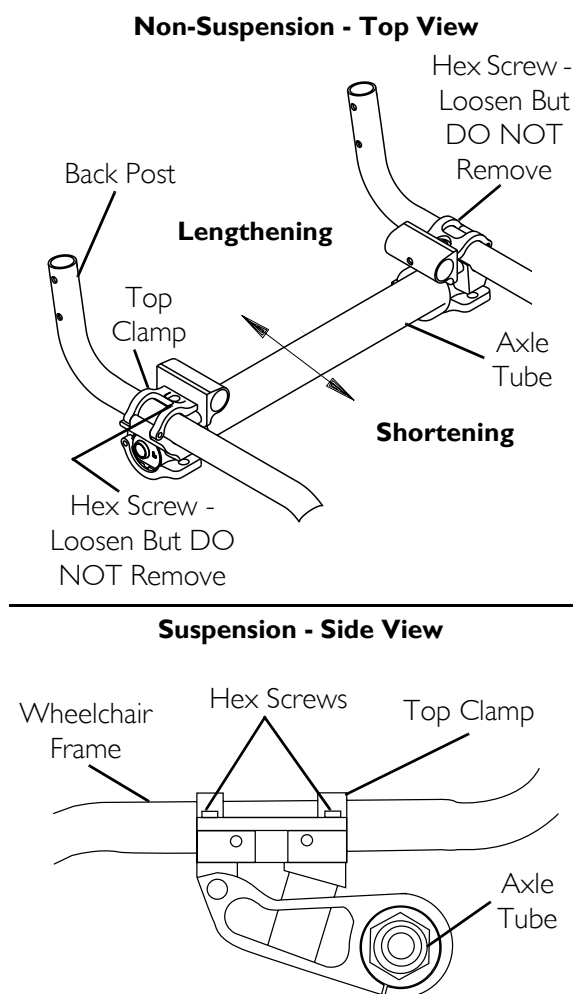


FIGURE 6.13 Adjusting Wheelbase Length
(Adjusting Center of Gravity)

Adjusting Wheelbase Width

NOTE: Perform this procedure on one (1) side of the wheelchair at a time for ease of adjustment.

Camber Tube 2000

NOTE: The wheelbase width can be increased/decreased by 1-inch.

NOTE: For this procedure, refer to FIGURE 6.14.

1. Remove the rear wheels. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
2. Torque the axle nut to increase/decrease the wheelbase width.
3. Count the number of threads showing on the axle bolt.

NOTE: The number of threads showing on the axle bolt should be equal on both sides of the wheelchair. Otherwise, wheelchair performance may be affected.

4. Repeat STEPS 2-3 for the opposite axle nut and axle bolt.

NOTE: Axle bolt removed from axle tube for clarity. It is not necessary to remove the axle bolt for this procedure.

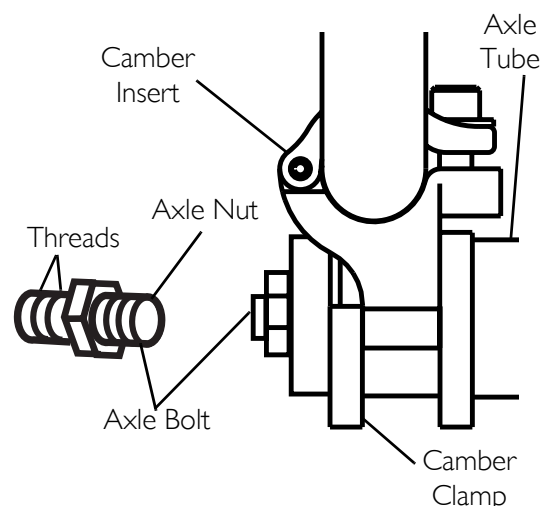


FIGURE 6.14 Adjusting Wheelbase Width
- Camber Tube 2000

A4 Camber System

NOTE: For this procedure, refer to FIGURE 6.15.

1. Open the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.

⚠ WARNING

NEVER position the camber inserts in the axle tube with more than 3-inches (12 indexing marks showing) of the camber insert outside of the axle tube. The camber inserts will not be securely tightened in the axle tube. Possible injury to the user or damage to the wheelchair may occur.

2. Position camber insert to the desired position. Make sure there are no more than 3-inches (12 indexing marks showing) of the camber inserts outside of the axle tube.
3. Slide the indexing ring on the camber insert until it is flush with the camber clamp.

NOTE: Before using the wheelchair, make sure both camber inserts are set at the same indexing mark. This will make sure the distance between the rear wheel and the wheelchair is the same on both sides.

⚠ WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are pointing towards the rear of the wheelchair and are in the **CLOSED** position **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

STANDARD AND SUSPENSION CAMBER CLAMPS - Make sure the hex screws are securely tightened **BEFORE** using the wheelchair, otherwise personal injury or damage to the wheelchair may occur.

4. Close the camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
5. Repeat STEPS 1-4 for opposite side of wheelchair.

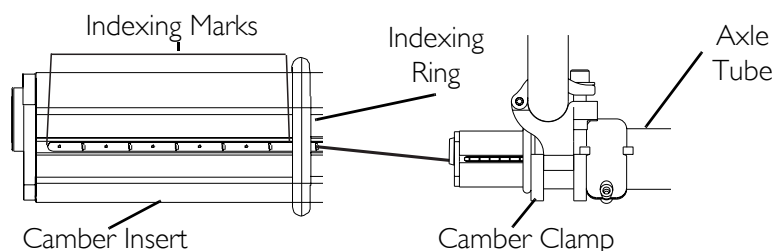


FIGURE 6.15 Adjusting Wheelbase Width - A4 Camber System


Replacing Axle Tube

NOTE: For this procedure, refer to FIGURE 6.16.

NOTE: The camber bar is always mounted to the BOTTOM of the wheelchair frame.

NOTE: There is no need to remove the two (2) camber clamps when replacing the axle tube.

1. A4 Camber System Only - Note the position of the camber inserts so they can be installed at the same position in the new axle tube.
2. Open the camber clamps. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
3. Remove the two (2) rear wheels. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.
4. A4 Camber System Only - Remove the camber inserts positioned in the axle tube.
5. A4 Camber System Only - Loosen, but do not remove the two (2) phillips screws that secure the toe adjustment rings to the axle tube.

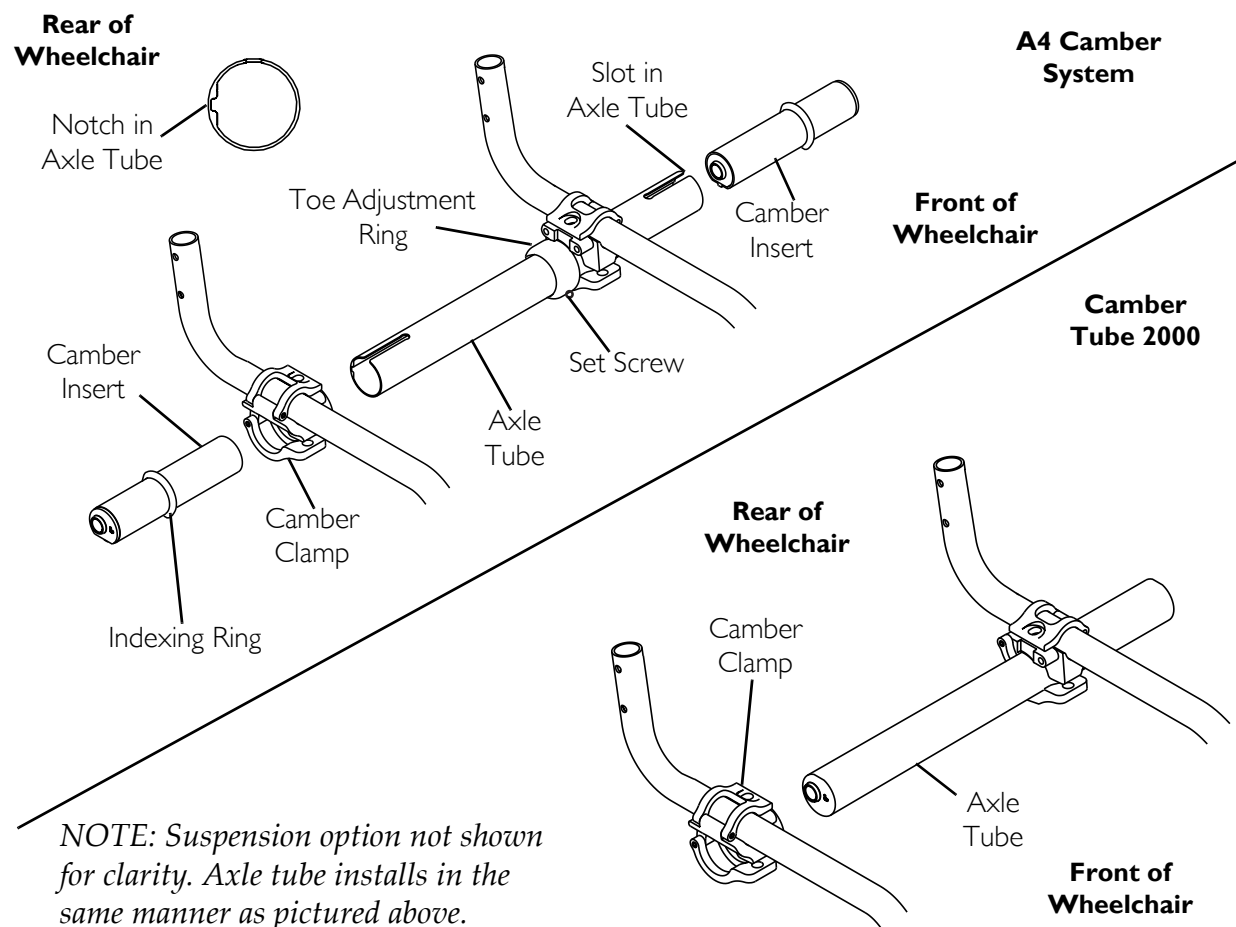**FIGURE 6.16** Replacing Axle Tube

6. Pull the existing axle tube through one (1) of the camber clamps.
7. A4 Camber System Only - Remove toe adjustment rings from the existing axle tube.
8. Pull the existing axle tube through the other camber clamp and remove from the wheelchair.
9. Slide the new axle tube through one (1) of the camber clamps.

NOTE: A4 Camber System Only - Make sure the notches in the axle tube are towards the rear of the wheelchair and the slots in the axle tube are facing up.

10. A4 Camber System Only - Install the adjustment rings onto the new axle tube. Make sure the stops on the adjustment rings are facing towards the outside of the wheelchair.

NOTE: Do not tighten the phillips screws that secure the adjustment rings to the axle tube at this time.

11. Slide the new axle tube through the other camber clamp until the axle tube is evenly spaced between the camber clamps.

NOTE: Do not close the camber clamps at this time.

⚠ WARNING

NEVER position the camber inserts in the axle tube with more than 3-inches (12 indexing marks showing) of the camber insert outside of the axle tube. The camber inserts will not be securely tightened in the axle tube. Possible injury to the user or damage to the wheelchair may occur.

12. A4 Camber System Only - Install camber inserts into the NEW axle tube and slide the camber inserts to the position noted in STEP 1. Make sure there are no more than 3-inches (12 indexing marks) of the camber inserts outside of the axle tube.

13. A4 Camber System Only - Slide the indexing ring on the camber insert until it is flush with the camber clamp.

NOTE: To maximize rollability: Before using the wheelchair, make sure both camber inserts are set to the same indexing notch. This will make sure the distance between the rear wheel and the wheelchair is the same on both sides.

14. Install the rear wheels onto the wheelchair. Refer to Removing/Installing Rear Wheels on page 39 in this section of the manual.

15. Adjust the axle tube. Refer to Adjusting the Axle Tube on page 55 in this section of the manual.

NOTE: The performance of the wheelchair will be affected if the toe in/toe out of the wheelchair is not correct.

Adjusting the Axle Tube

NOTE: For this procedure, refer to FIGURE 6.17.

⚠ WARNING

QUICK RELEASE LEVERS - Make sure the quick release levers are in the **CLOSED** position **BEFORE** using the wheelchair, otherwise injury or damage to the wheelchair may occur.

STANDARD and suspension camber clamps - Make sure the hex screws are securely tightened **BEFORE** using the wheelchair, otherwise injury or damage to the wheelchair may occur.

⚠ CAUTION

A4 CAMBER SYSTEM ONLY - **DO NOT** close the quick-release levers or tighten the hex screws without camber inserts in the axle tube. Damage to the axle tube will occur.

NOTE: Stand behind the wheelchair to determine left or right.

Camber Tube 2000

1. If necessary, open both camber clamps. Refer to [Opening/Closing Camber Clamps](#) on page 43 in this section of the manual.
2. Using an "L" square, rotate the axle tube until the flat edge of the camber tube is at a 90° angle with the ground/floor as shown in FIGURE 6.17.
3. Close both camber clamps. Refer to [Opening/Closing Camber Clamps](#) on page 43 in this section of the manual.
4. Determine the toe in/toe out of the wheelchair. Refer to [Determining Toe In/Toe Out](#) on page 46 in this section of the manual.

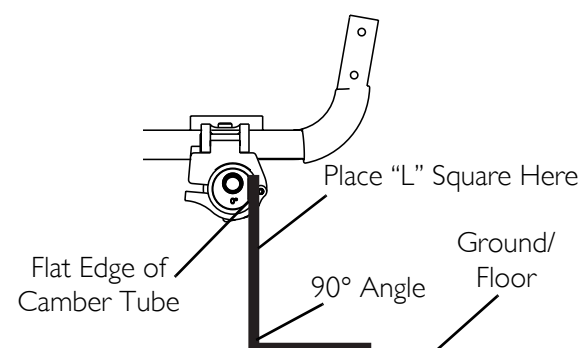


FIGURE 6.17 Adjusting the Axle Tube - Camber Tube 2000

A4 Camber System

NOTE: For this procedure, refer to FIGURE 6.18.

NOTE: Before performing this procedure, make sure the camber inserts are positioned to the lowest degree of camber. Refer to [Adjusting Rear Wheel Camber](#) on page 45 in this section of the manual.

1. If necessary, open BOTH camber clamps. Refer to [Opening/Closing Camber Clamps](#) on page 43 in this section of the manual.
2. Loosen the set screw that secures each toe adjustment ring to the axle tube (FIGURE 6.18).
3. Using an "L" square, rotate the axle tube until the flat edge of the camber insert is at a 90° angle with the ground/floor as shown in FIGURE 6.18.
4. Close the right camber clamp. Refer to [Opening/Closing Camber Clamps](#) on page 43 in this section of the manual.
5. Rotate the Left toe adjustment ring until the tab stops against the LOWER metal tab on the camber clamp.
6. Securely tighten set screw on left toe adjustment ring.
7. Measure the distance between the center lines at the rear and front of the rear wheels at approximately 12-inches from the ground/floor. Refer to [Determining Toe In/Toe Out](#) on page 46 in this section of the manual.
8. Perform one (1) of the following:
 - A. Toe In/Toe Out Measurement is Within $\pm 1/8$ -inch - Proceed to step 9.
 - B. Toe In/Toe Out Measurement is Not Within $\pm 1/8$ -inch - Repeat steps 1-7 until toe in/toe out measurement is within $\pm 1/8$ inch.
9. Open the right camber clamp. Refer to [Opening/Closing Camber Clamps](#) on page 43 in this section of the manual.

10. Reposition the camber inserts to the highest degree of camber. Refer to Adjusting Rear Wheel Camber on page 45 in this section of the manual.
11. Repeat STEP 3.
12. Close the left camber clamp. Refer to Opening/Closing Camber Clamps on page 43 in this section of the manual.
13. Rotate the Right toe adjustment ring until the tab stops against the upper metal tab on the camber clamp.
14. Securely tighten set screw on right toe adjustment ring.
15. Repeat STEP 7.
16. Perform one (1) of the following:
 - A. Toe In/Toe Out Measurement is Within $\pm 1/8$ -inch -
 - i. Proceed to STEP 17.
 - B. Toe In/Toe Out Measurement is Not Within $\pm 1/8$ -inch -
 - i. Repeat STEP 1.
 - ii. Loosen the set screw on the right toe adjustment ring.
 - iii. Repeat STEP 3.
 - iv. Repeat STEPS 12-16 until toe in/toe out measurement is within $\pm 1/8$ inch.
17. If desired, reposition camber inserts to the desired degree of camber. Refer to Adjusting Rear Wheel Camber on page 45 in this section of the manual.

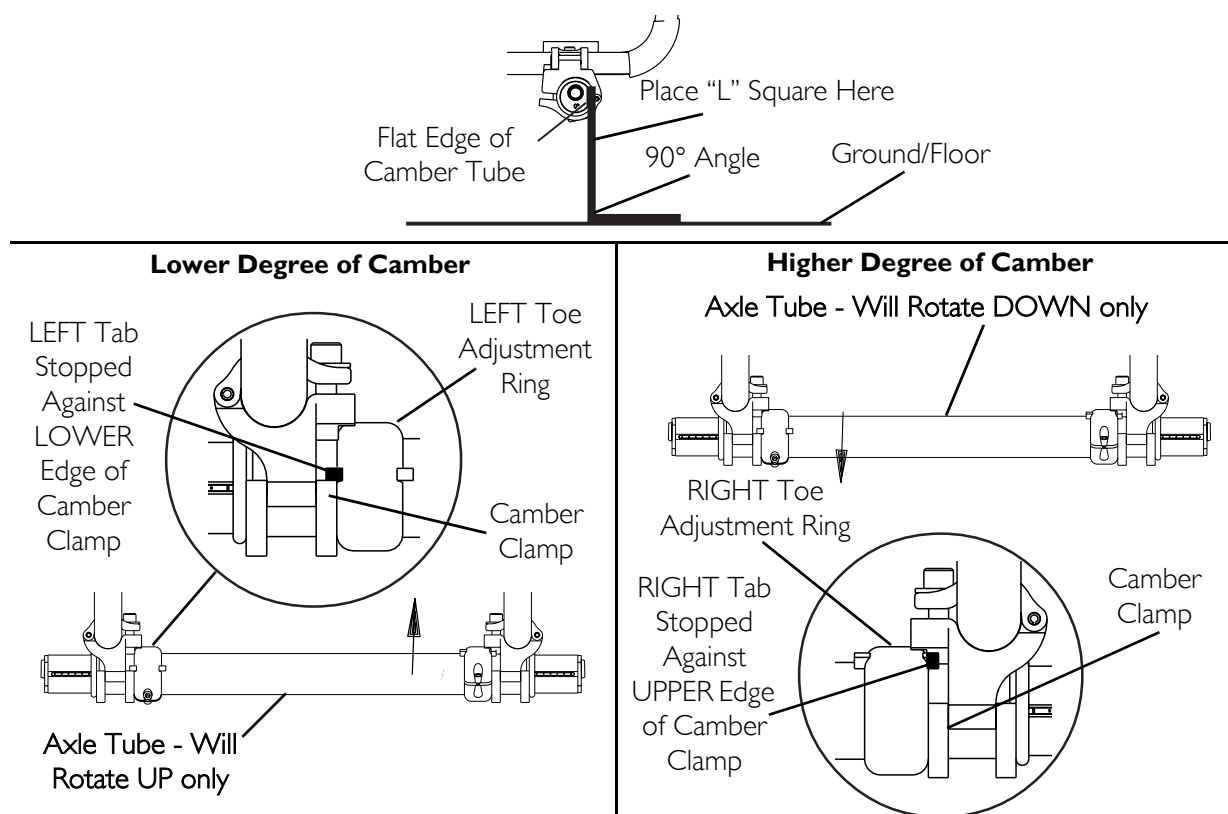


FIGURE 6.18 Adjusting the Axle Tube - A4 Camber System

Replacing/Adjusting Casters

NOTE: For this procedure, refer to FIGURE 6.19.

NOTE: Non-suspension casters cannot be adjusted as they mount in one (1) position only.

△ CAUTION

Changing the size/type of and/or repositioning the front casters can affect the performance of the wheelchair. Contact Invacare at the telephone numbers on the back of this manual BEFORE performing this procedure.

1. Perform one (1) of the following:
 - A. Non-Suspension Fork - Remove the bolt and locknut that secure the front caster to the fork.
 - B. Suspension Fork - Perform the following steps:
 - i. Using two (2) allen wrenches, turn in opposite directions and remove one (1) mounting screw from the fork.
 - ii. Remove the mounting screw/threaded sleeve assembly that secures the front caster and two (2) spacers to the fork.
2. Remove front caster and axle spacers from fork.

3. Perform one (1) of the following:
 - A. Non-Suspension Fork - Install the NEW caster, bolt, locknut and axle spacers onto the fork and securely tighten.
 - B. Suspension Fork - Perform the following steps:
 - i. Determine the desired mounting hole for the caster installation.
 - ii. Line up the front caster and two (2) spacers with the mounting hole in the fork determined in STEP B-1.
 - iii. Reinstall the mounting screw/threaded sleeve assembly through the fork, front caster and two (2) spacers. Refer to FIGURE 6.19 for hardware orientation.
 - iv. Reinstall the mounting screw into the threaded sleeve and tighten securely.

⚠ **WARNING**

Both front casters *MUST* be positioned to the same corresponding mounting hole, otherwise injury or damage may occur.

4. Repeat STEPS 1-3 for the opposite caster if necessary.

*NOTE: If replacing front casters with a different size than what was originally on the wheelchair, the front caster height *MUST* be adjusted to keep the wheelchair frame parallel to the floor. Refer to Adjusting Front Caster Height on page 60 in this section of the manual. The size of the rear wheels may also need adjustment. Refer to Repairing/Replacing Rear Wheel, Tire/Tube on page 42 in this section of the manual.*

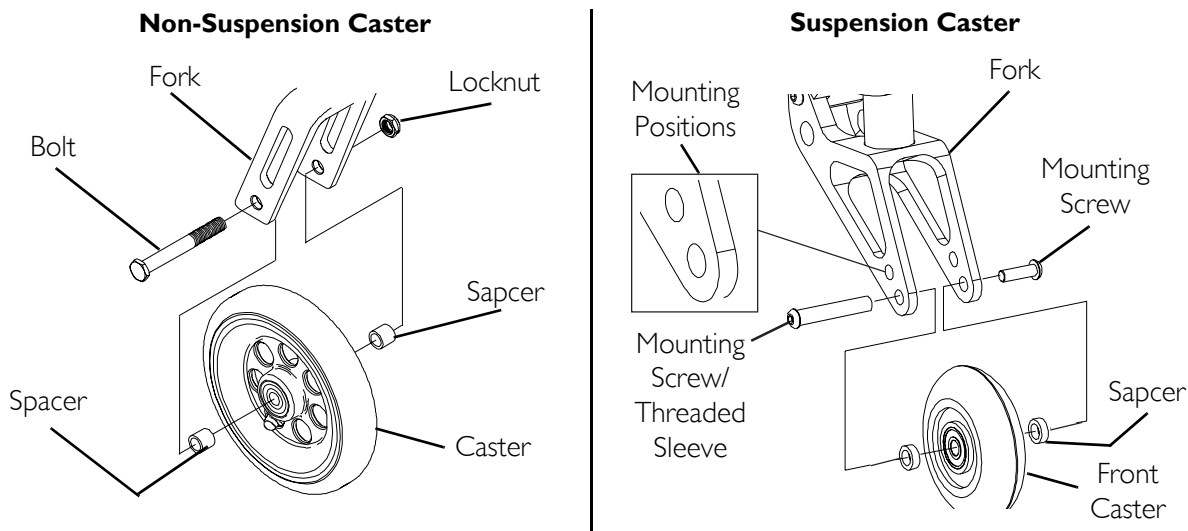


FIGURE 6.19 Replacing/Adjusting Casters

Adjusting Front Caster Height

NOTE: For this procedure, refer to FIGURE 6.20.

△ CAUTION

Changing the height of the front casters can affect the performance of the wheelchair. Contact Invacare at the telephone numbers on the back of this manual BEFORE performing this procedure.

NOTE: When changing a rear wheel/front caster to a different size/type and or changing the original degree of camber of the wheelchair, it becomes necessary to adjust the front caster height so the wheelchair frame will remain parallel to the floor.

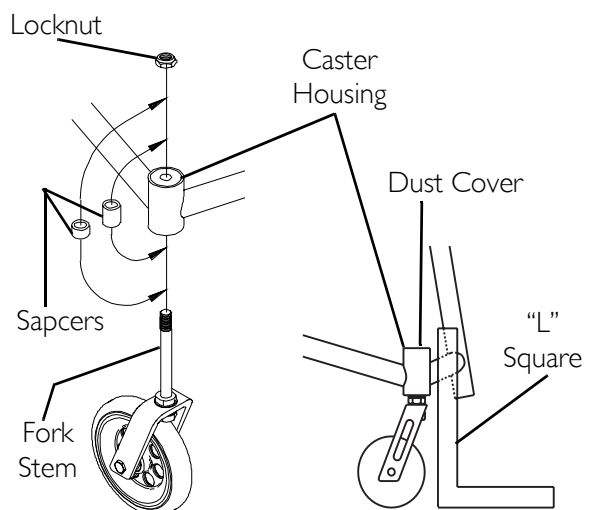


FIGURE 6.20 Adjusting Front Caster Height

1. Place the wheelchair on a flat surface.
2. Remove the dust cover on the fork assembly.
3. Remove the locknut that secures the front caster fork to the wheelchair frame.
4. Position a large right triangle or "L" square on the flat surface and against the caster housing that is welded to the wheelchair frame.
5. Adjust the height of the front casters by either adding or removing spacers from the fork stem until the wheelchair frame is parallel with the floor.
6. Reinstall locknut and dust cover onto the wheelchair.
7. Repeat this procedure for the opposite front caster.

Wheel Lock Adjustment/Replacement

NOTE: For this procedure, refer to FIGURE 6.21.

NOTE: Invacare recommends low mount wheels locks when engaging in any contact sport.

NOTE: Before adjusting or replacing the High/Low mount wheel locks, ensure that the tires are inflated to the recommended psi on the sidewall of the tire.

1. Loosen the locknuts and hex/allen screws that secure the High/Low mount wheel locks to side frame.
2. Perform one (1) of the following:
 - Replacing the High/Low Mount Wheel Lock:
 - i. Remove the locknuts and hex/allen screws and remove existing wheel lock from the wheelchair.
 - ii. Install the NEW wheel lock and adjust.

- Adjusting the High/Low Mount Wheel Lock:
 - i. Measure the distance between the wheel lock shoe and the rear wheel.
 - ii. Slide the wheel lock along the wheelchair until the measurement is between 5/32 and 5/16-inches.
 - iii. Tighten the wheel lock to the wheelchair frame.
 - iv. Repeat this procedure for the opposite wheel lock.
 - v. Engage the wheel locks and push against the wheelchair to determine if the wheel locks engage the rear wheels enough to hold the occupied wheelchair.
 - vi. Repeat STEPS A-E until the wheel locks engage the rear wheels enough to hold the occupied wheelchair.

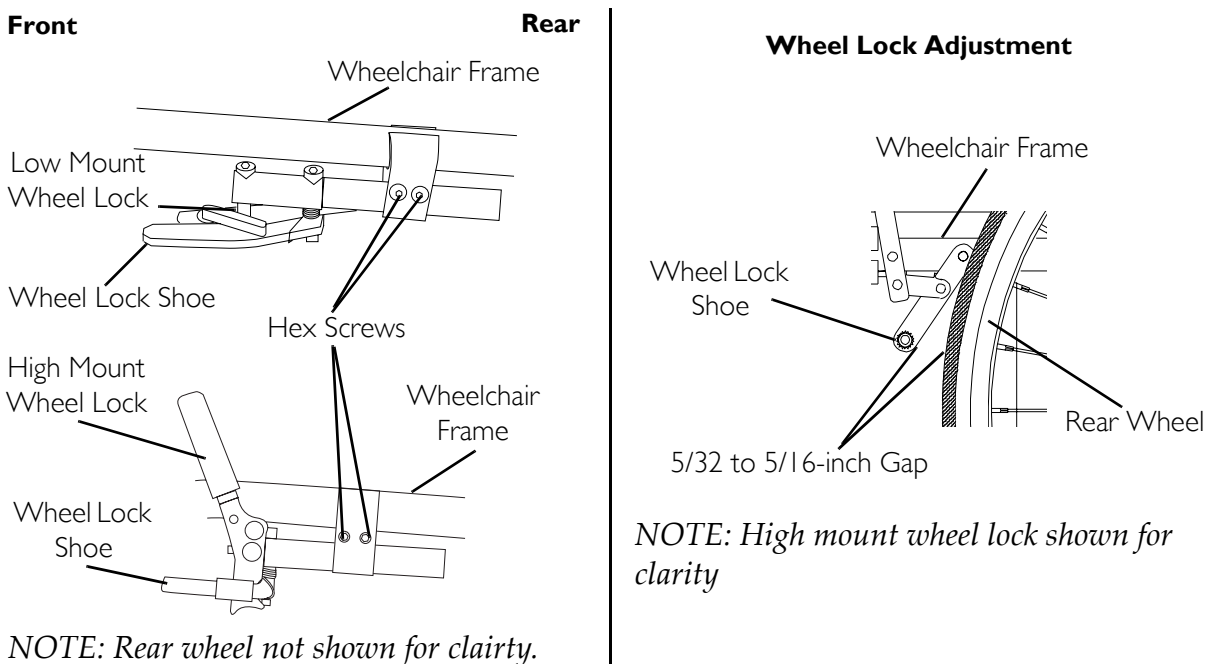


FIGURE 6.21 Wheel Lock Adjustment/Replacement

SECTION 7—FOOTREST/ ANTI-TIPPER

⚠ WARNING

After **ANY** adjustments, repair or service and **BEFORE** use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.

ALWAYS perform this procedure in the presence of an assistant. The position of the footrest, camber tube, back angle, the tautness of the back upholstery as well as the user's condition are directly related to the wheelchairs stability. Any change to one (1) or any combination of the five (5) may cause the wheelchair to decrease in stability. Use **EXTREME** caution when using a new seating position. The addition of anti-tippers may be required.

Check **ALL** allen screws that secure the footrest/raised footrest system to the wheelchair frame to make sure they are securely tightened **BEFORE** using the wheelchair. **ESPECIALLY** if engaging in **ANY** contact sport.

The footrest assembly **MUST** be at least 1-3/4-inches above the ground/floor to avoid hitting protruding objects when using this wheelchair.

Adjusting/Replacing Standard Footrest

NOTE: For this procedure, refer to FIGURE 7.1.

1. Loosen the two (2) allen screws that secure the footrest to the wheelchair frame.

If Replacing the Footrest

1. Remove EXISTING footrest.
2. Install NEW footrest.

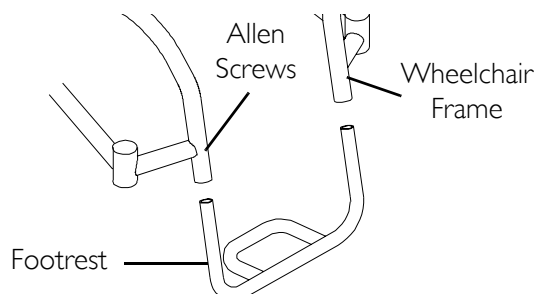


FIGURE 7.1 Adjusting/Replacing Standard Footrest

⚠ WARNING

The standard footrest has an open hoop. A footplate cover is recommended for wheelchair users that have leg spasticity or whose feet have a possibility of falling through the footrest hoop. A calf strap is provided with each wheelchair to prevent the feet from slipping backwards off of the footrest. Be sure the calf strap is secure when using the wheelchair.

If Replacing or Adjusting the Footrest

1. Position NEW/EXISTING footrest to desired height.
2. Tighten the two (2) allen screws that secure the footrest to the wheelchair frame.

Installing/Adjusting Optional Clamp on Raised Footrest

NOTE: For this procedure, refer to FIGURE 7.2.

Installing

1. Install the two (2) half clamps onto either side of the wheelchair frame approximately 2-inches above existing footrest with two (2) provided allen screws.
2. Repeat for the opposite side of the wheelchair.
3. Slide the clamp on raised footrest into the half clamps to the desired height.
4. Securely tighten the four (4) allen screws.

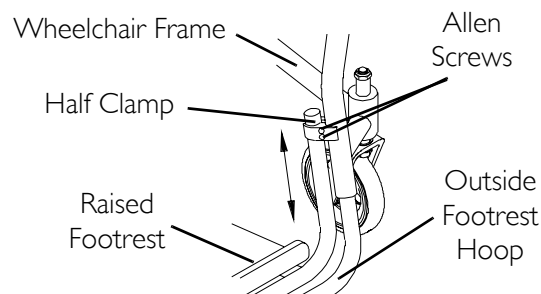


FIGURE 7.2 Installing/Adjusting Optional Clamp on Raised Footrest

Adjusting

1. Loosen the four (4) allen screws.
2. Adjust clamp on raised footrest to the desired height.
3. Securely tighten the four (4) allen screws.

NOTE: This procedure is for Terminator Everyday (ED) wheelchairs ONLY.

Installing/Adjusting Optional A4 Footrest

NOTE: For this procedure, refer to FIGURE 7.3.

NOTE: This procedure is for Terminator Everyday (ED) wheelchairs Only.

Replacing the Footrest

1. Loosen, but do not remove the two (2) allen screws that secure the footrest to the wheelchair frame.
2. Slide the EXISTING footrest tubes out of the wheelchair frame and install NEW footrest by reversing this step.
3. Position the NEW footrest to a determined height.
4. Tighten the two (2) allen screws that secure the footrest to the wheelchair frame.
5. Adjust the footplate to the desired position. Refer to [Footplate Angle Adjustment](#) on page 64 and/or Refer to [Footplate Depth Adjustment](#) on page 64 in this section of the manual.

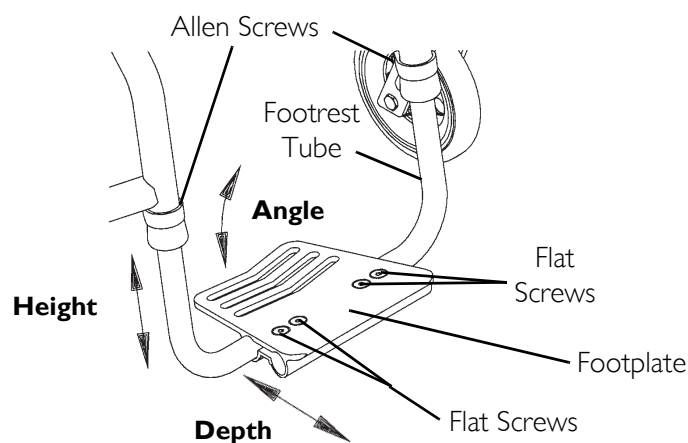


FIGURE 7.3 Installing/Adjusting Optional A4 Footrest

Footplate Angle Adjustment

1. Loosen, but do not remove the four (4) flat screws and locknuts that secure the footplate to the two (2) footrest tubes.
2. Position the footplate to the necessary angle to accommodate the user.
3. Retighten the four (4) flat screws and locknuts.

NOTE: The locknuts should lie in the channel of the footplate half clamp.

Footplate Depth Adjustment

1. Loosen, but do not remove the four (4) flat screws and locknuts that secure footplate to the footrest tubes.

NOTE: Observe the angle of footplate for reinstallation.

2. Move the footplate to one (1) of two (2) positions to accommodate the user.
3. Retighten the four (4) flat screws and locknuts.

NOTE: The settings for positioning the footplates on the half-clamps may vary for each end-user.

NOTE: The locknuts should lie in the channel of the footplate half clamp.

Installing the X-Terminator Footrest

NOTE: For this procedure, refer to FIGURE 7.4.

1. Install the two (2) half clamps onto either side of the wheelchair frame approximately 2-inches above the existing footrest with two (2) provided allen screws.
2. Repeat for the opposite side of the wheelchair.
3. Slide the clamp on raised footrest into the half clamps to the desired height.
4. Securely tighten the four (4) allen screws.

Adjusting the X-terminator and Transformer Footrests

NOTE: For this procedure, refer to FIGURE 7.4 and FIGURE 7.5.

Depth Adjustment

1. Remove the four (4) allen screws from the footrest and blocks.
2. Move footrest rearward or forward to desired depth.
3. Align the holes in the footrest with the holes in the blocks on footrest tubing.
4. Reinsert allen screws into footrest and into the blocks.
5. Securely tighten the four (4) allen screws.

Angle Adjustment

1. Loosen the button screws on the blocks on bottom of the footrest tubing.
2. Adjust the angle of the footrest.
3. Retighten the button screws securely.

X-Terminator Height Adjustment

1. Loosen the four (4) allen screws.
2. Adjust clamp on raised footrest to the desired height.
3. Securely tighten the four (4) allen screws.

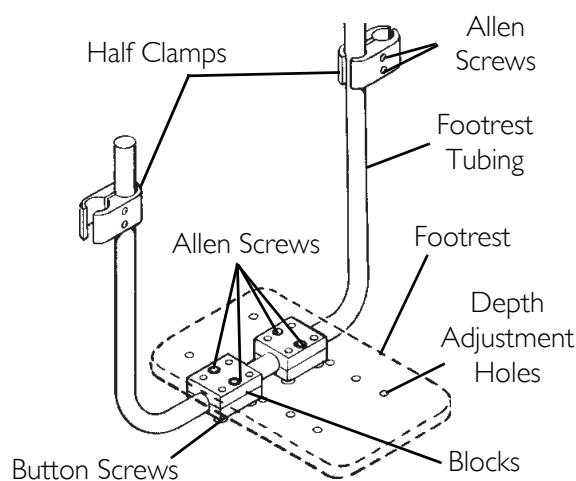


FIGURE 7.4 Installing the X-Terminator Footrest - Adjusting the X-terminator and Transformer Footrests - Depth/Angle/X-Terminator Height Adjustment

Transformer Height Adjustment

NOTE: For this procedure, refer to FIGURE 7.5.

1. Note the order of the mounting screw, coved washers, spacer, half clamps and mounting screw/threaded sleeve and their position on the wheelchair frame and footrest tubing.
2. Remove the mounting screw, coved washers, spacer, half clamps and mounting screw/threaded sleeve on both sides of the wheelchair.
3. Choose an adjustment hole on the footrest tubing that will raise or lower the footrest to the desired position. Replace the parts.
4. Securely tighten.

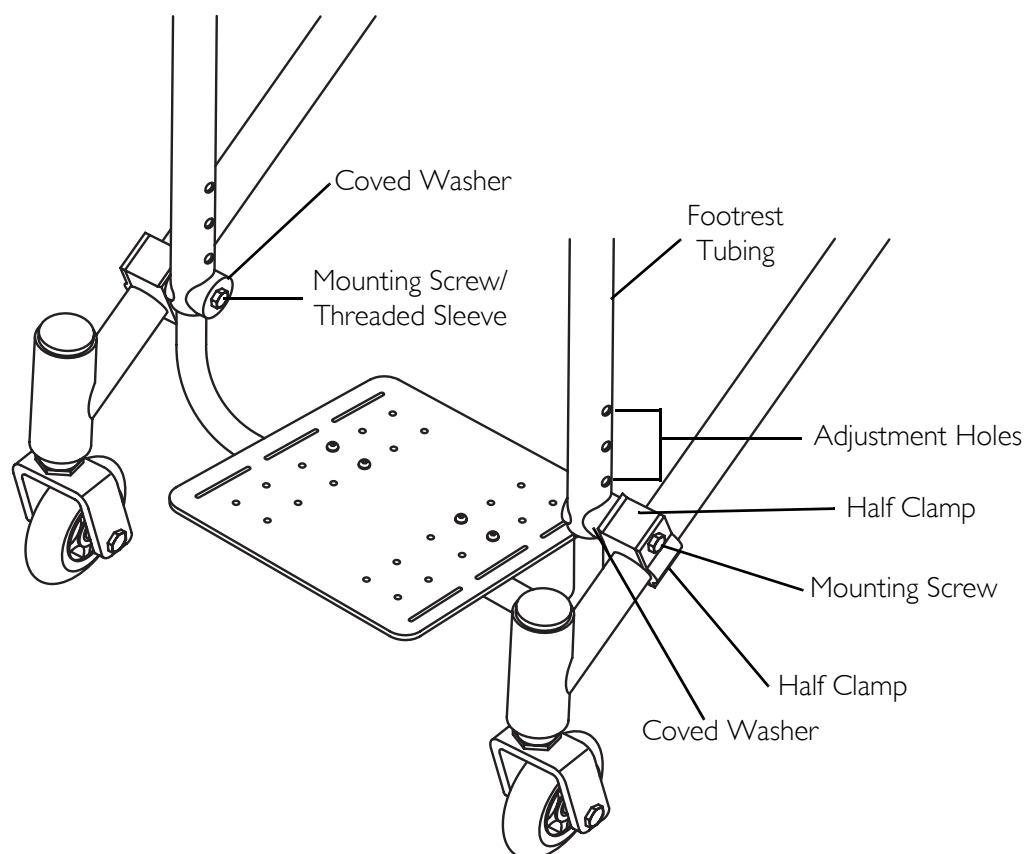


FIGURE 7.5 Adjusting the X-terminator and Transformer Footrests - Transformer Height Adjustment

Anti-tipper Adjustment/Replacement

NOTE: For this procedure, refer to FIGURE 7.6.

⚠ WARNING

Anti-tippers MUST BE attached at all times. Inasmuch as the ANTI-TIPPERS are an option on this wheelchair (You may order it with or without the anti-tippers), Invacare strongly recommends ordering the anti-tippers as an additional safeguard for the wheelchair user.

Anti-tippers MUST be fully engaged. Ensure the the release button of the anti-tipper fully protrudes out of the hole in the anti-tipper socket.

Ensure both anti-tippers are adjusted to the same height.

NOTE: To ensure the correct model anti-tipper is used refer to FIGURE 7.6. Measurements for anti-tippers are approximate and are taken using the TOP adjustment hole on the anti-tipper (DETAIL "A").

Anti-tipper Adjustment

⚠ WARNING

When anti-tippers are used, anti-tippers **MUST be adjusted to maintain a 1-1/2 to 2-inch clearance between the bottom of the anti-tipper wheels and the ground/floor. This spacing should always be checked whenever adjustments/changes are made to the wheelchair. Failure to maintain proper spacing may result in the chair tipping over backward causing serious injury or property damage.**


1. Press in the release button that secures the anti-tipper wheels to the anti-tipper bar.
2. Adjust the height of the anti-tipper wheels to between 1-1/2 and 2-inches of the ground/floor.
3. Repeat STEPS 1-2 for the opposite anti-tipper.

Anti-tipper Replacement

⚠ WARNING

When anti-tippers are used, anti-tippers **MUST be adjusted to maintain a 1-1/2 to 2-inch clearance between the bottom of the anti-tipper wheels and the ground/floor. This spacing should always be checked whenever adjustments/changes are made to the wheelchair. Failure to maintain proper spacing may result in the chair tipping over backward causing serious injury or property damage.**

1. Press in the release button that secures the existing anti-tipper to the anti-tipper socket and remove the anti-tipper from the anti-tipper socket.
2. Insert the new anti-tipper into the anti-tipper socket until release button engages.
3. Press in the release button on the anti-tipper bar and install the anti-tipper wheels onto the new anti-tipper bar.
4. Repeat STEPS 1-3 for the opposite anti-tipper.
5. Measure the distance between the bottom of the anti-tipper wheels and the ground floor.
6. If necessary, adjust the height of the anti-tippers. Refer to [Anti-tipper Adjustment](#) on page 67 in this section of the manual.

PART NUMBER	MEASUREMENT
1112178	 2 1/8-inches

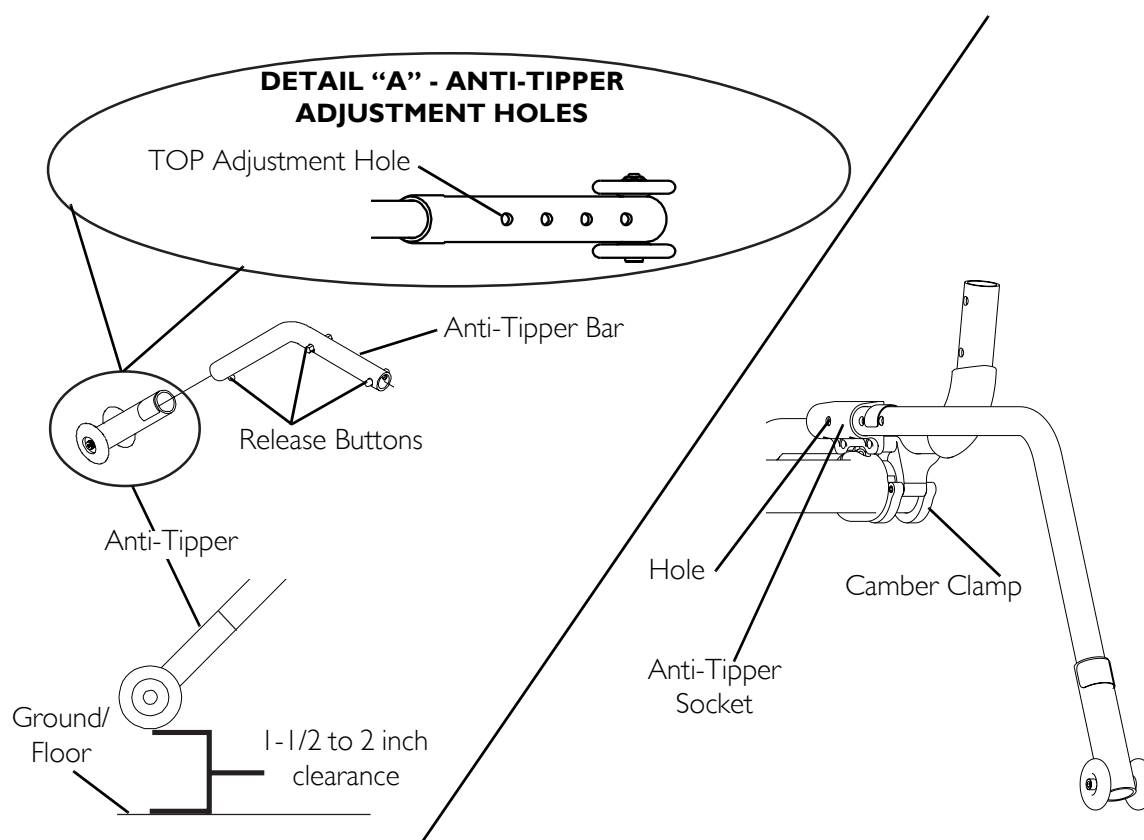


FIGURE 7.6 Anti-tipper Adjustment/Replacement

Swivel Anti-Tip Installation/Removal/Adjustment

NOTE: For this procedure, refer to FIGURE 7.7.

NOTE: This applies to any Terminator ordered with swivel anti-tip.

Installation/Depth Adjustment

1. Loosen set screws on anti-tip receivers (FIGURE 7.7).
2. Slide the swivel anti-tip into the anti-tip receivers. Position swivel anti-tip so it is even with wheels on chair or extends beyond them. Tighten set screws.

Removal

1. Loosen set screws on anti-tip receivers (FIGURE 7.7).
2. Slide the swivel anti-tip out of the receivers.

Height Adjustment

All Wheelchairs with Swivel Anti-tip Except Paul Schulte Signature BB Models

1. To adjust the height of the swivel anti-tip, remove dust cover and loosen set screw on swivel anti-tip caster assembly (FIGURE 7.7).
2. Set anti-tip caster wheel to desired height. Tighten set screw and reinstall dust cover.

Paul Schulte Signature BB Models ONLY

NOTE: For this procedure, refer to FIGURE 7.7 DETAIL A.

1. Remove the dust cover on the anti-tip caster fork assembly.
2. Remove the locknut that secures the anti-tip caster fork assembly to the anti-tipper.
3. Adjust the height of the anti-tip caster fork assembly to the desired height by either adding or removing spacers from the fork stem.
4. Reinstall locknut and dust cover onto the wheelchair.

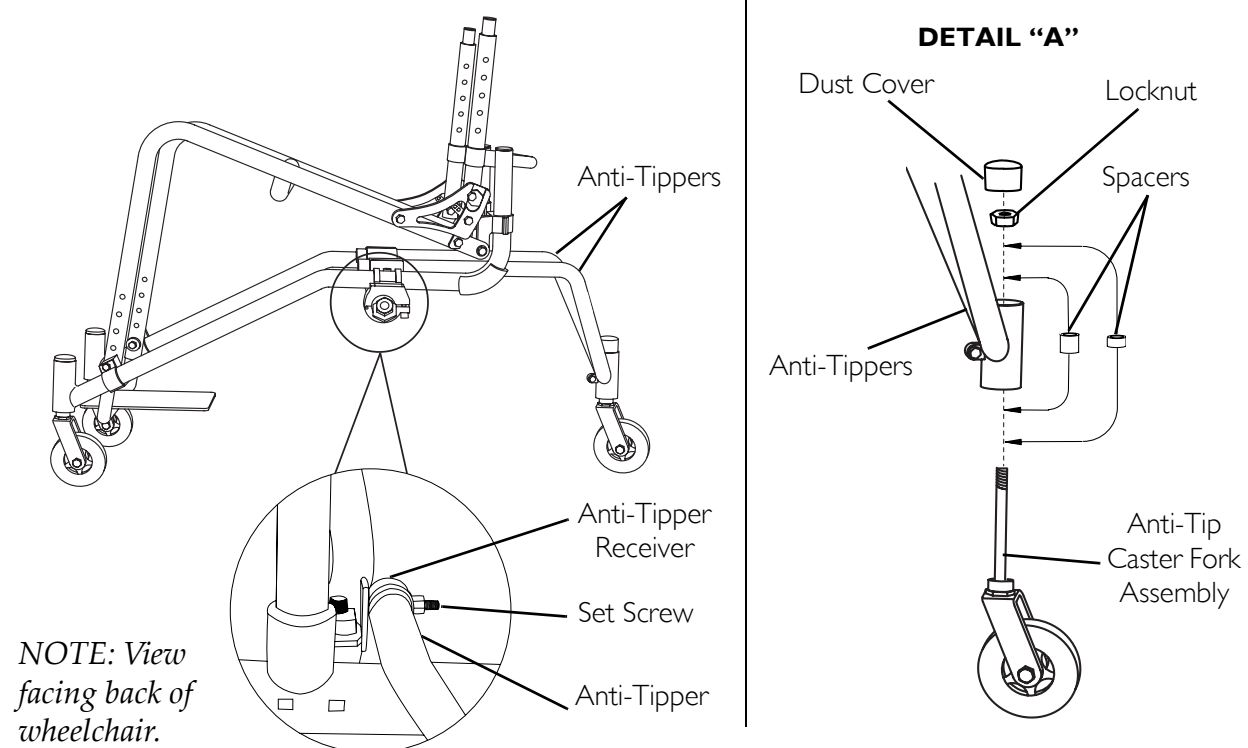


FIGURE 7.7 Swivel Anti-Tip Installation/Removal/Adjustment

SECTION 8—SUSPENSION

⚠ WARNING

After ANY adjustments, repair or service and BEFORE use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.

NOTE: The following procedures are for wheelchairs with the suspension option ONLY.

Elastomers and Suspension

NOTE: The performance of the wheelchair will be affected if elastomers ARE NOT the same on BOTH SIDES of the wheelchair.

Replacing Rear Elastomers

NOTE: For this procedure, refer to FIGURE 8.1.

1. Use an allen wrench to hold the outer allen screw.
2. While holding the outer allen screw in position, remove the inner allen screw from the pivot pin.
3. Use the allen wrench to push the pivot pin with outer allen screw out of the mounting hole.
4. Remove the existing elastomer.
5. Position the new elastomer between the recess in the axle bracket and the recess in the suspension base.
6. Compress and hold the elastomer between the axle bracket and the suspension base.
7. Insert the pivot pin into the mounting hole.
8. Install the outer allen screw into the pivot pin.
9. Use an allen wrench to hold the outer allen screw in position.
10. While holding the outer allen screw, install the inner allen screw into the pivot pin. Tighten securely.

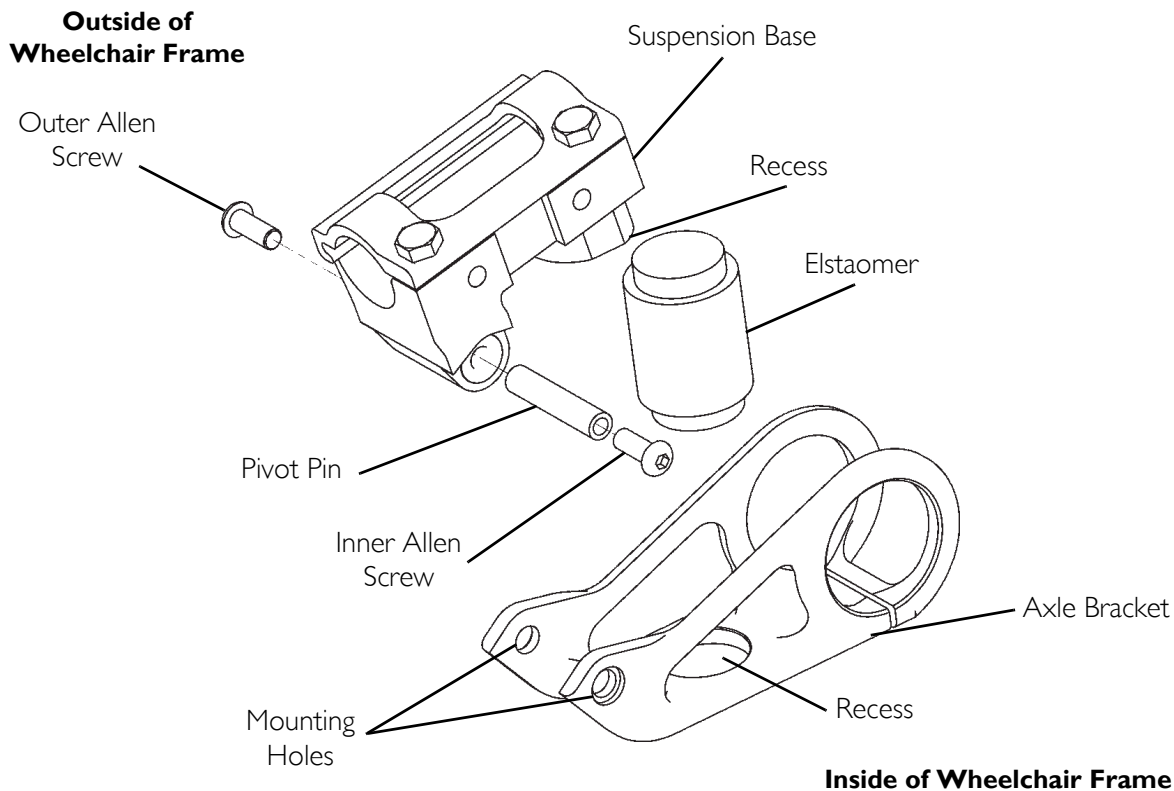


FIGURE 8.1 Replacing Rear Elastomers

Replacing Front Elastomers

NOTE: For this procedure, refer to FIGURE 8.2.

△ CAUTION

DO NOT use excessive force when removing/installing the threaded sleeve from/onto the fork. Damage to the threaded sleeve may occur.

1. Using two (2) allen wrenches, turn in opposite directions and remove one (1) mounting screw from fork.

NOTE: One (1) mounting screw will not turn.

2. Remove the threaded sleeve and mounting screw assembly from the fork. DO NOT use excessive force.
3. Remove the existing elastomer from the fork.
4. Install NEW elastomer determined in STEP 1 into fork.

NOTE: Make sure the elastomer sits in the two (2) recessed areas on the fork.

5. Align the mounting holes in the upper and lower portion of the fork.
6. Reinstall threaded sleeve and mounting screw assembly. DO NOT use excessive force.

⚠ WARNING

Use Loctite 242™ when reinstalling the mounting screw into the threaded sleeve, otherwise the fork can become disassembled. Possible injury or damage could occur.

7. Apply Loctite 242 to the mounting screw.
8. Reinstall the mounting screw into the threaded sleeve and tighten securely.

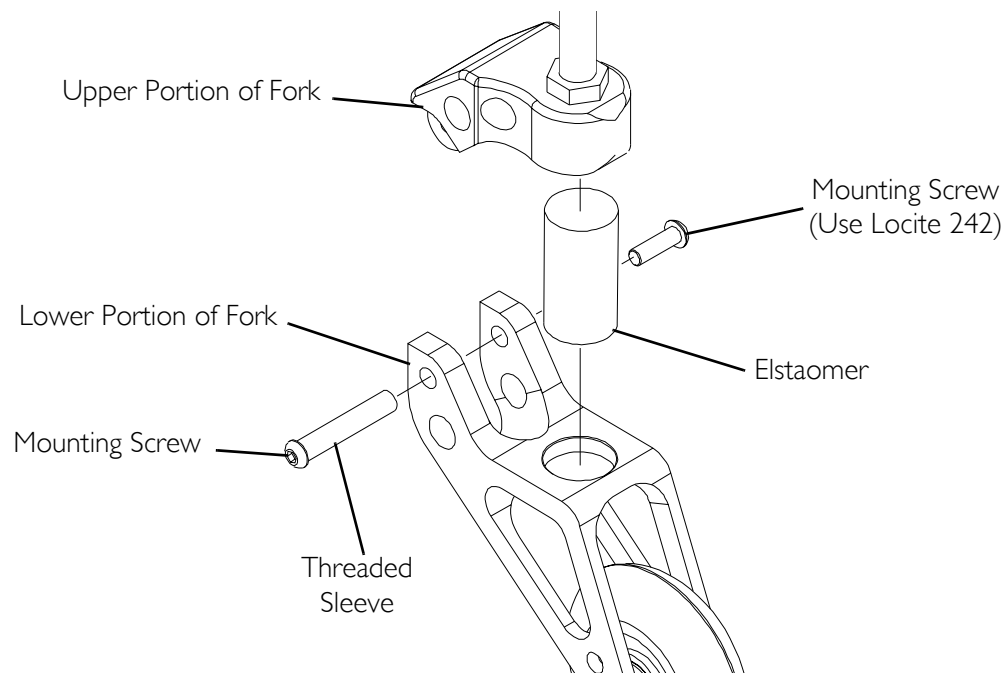


FIGURE 8.2 Replacing Front Elastomers

SECTION 9—WING/BUMPER

⚠ WARNING

After **ANY** adjustments, repair or service and **BEFORE** use, make sure all attaching hardware is tightened securely - otherwise injury or damage may occur.

NOTE: The following procedures are for Transformer wheelchairs ONLY.

Wing/Bumper Installation and Removal

NOTE: For this procedure, refer to FIGURE 9.1.

Wing/Bumper Installation

1. Slide wing/bumper clamps onto caster housing on the Transformer. Ensure the wing or bumper is even on both sides.
2. Tighten allen screws securely on each side.

Wing/Bumper Removal

1. Loosen allen screws on wing/bumper clamps.
2. Slide up and remove.

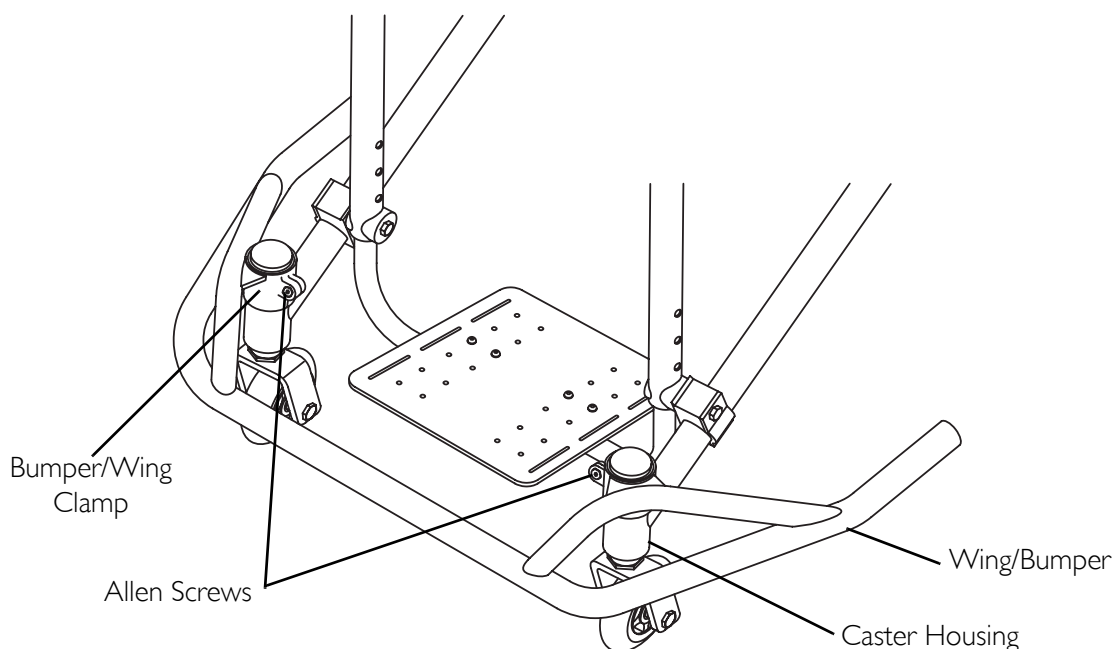


FIGURE 9.1 Wing/Bumper Installation and Removal

NOTES

LIMITED WARRANTY

PLEASE NOTE: THE WARRANTY BELOW HAS BEEN DRAFTED TO COMPLY WITH FEDERAL LAW APPLICABLE TO PRODUCTS MANUFACTURED AFTER JULY 4, 1975.

This warranty is extended only to the original purchaser/user of our products.

This warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.

Invacare warrants the frame to be free from defects in materials and workmanship for the original purchaser for the following periods of time from the date of purchase:

Terminator Titanium Everyday, Titanium Everyday Heavy Duty and Terminator Everyday, Everyday Heavy Duty wheelchairs: lifetime.

Terminator BB, X-Terminator BB, Paul Schulte Signature BB, X-Terminator Titanium, X-Terminator QR and Transformer All Sport: Three (3) years

All component parts including, but not limited to camber tubes, caster forks, armrests and upholstery are warranted against defects in materials and workmanship for a period of one (1) year from the date of purchase except push handle grips, bushings, bearings, and tires/tubes. If within such warranty period any such product shall be proven to be defective, such product shall be repaired or replaced, at Invacare's option. This warranty does not include any labor or shipping charges incurred in replacement part installation or repair of any such product. Invacare's sole obligation and your exclusive remedy under this warranty shall be limited to such repair and/or replacement.

For warranty service, please contact the dealer from whom you purchased your Invacare product. In the event you do not receive satisfactory warranty service, please write directly to Invacare Top End at the address on the back page. Provide dealer's name, address, date of purchase, indicate nature of the defect and, if the product is serialized, indicate the serial number. Do not return products to our factory without our prior consent.

LIMITATIONS AND EXCLUSIONS: THE FOREGOING WARRANTY SHALL NOT APPLY TO SERIAL NUMBERED PRODUCTS IF THE SERIAL NUMBER HAS BEEN REMOVED OR DEFACED, PRODUCTS SUBJECTED TO NEGLIGENCE, ACCIDENT, IMPROPER OPERATION, MAINTENANCE OR STORAGE, COMMERCIAL OR INSTITUTIONAL USE, PRODUCTS MODIFIED WITHOUT INVACARE'S EXPRESS WRITTEN CONSENT, INCLUDING, BUT NOT LIMITED TO, MODIFICATION THROUGH THE USE OF UNAUTHORIZED PARTS OR ATTACHMENTS; PRODUCTS DAMAGED BY REASON OF REPAIRS MADE TO ANY COMPONENT WITHOUT THE SPECIFIC CONSENT OF INVACARE, OR TO A PRODUCT DAMAGED BY CIRCUMSTANCES BEYOND INVACARE'S CONTROL, AND SUCH EVALUATION WILL BE SOLELY DETERMINED BY INVACARE. THE WARRANTY SHALL NOT APPLY TO PROBLEMS ARISING FROM NORMAL WEAR OR FAILURE TO ADHERE TO THESE INSTRUCTIONS.

THE FOREGOING EXPRESS WARRANTY IS EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTIES WHATSOEVER, WHETHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, AND THE SOLE REMEDY FOR VIOLATIONS OF ANY WARRANTY WHATSOEVER, SHALL BE LIMITED TO REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT PURSUANT TO THE TERMS CONTAINED HEREIN. THE APPLICATION OF ANY IMPLIED WARRANTY WHATSOEVER SHALL NOT EXTEND BEYOND THE DURATION OF THE EXPRESS WARRANTY PROVIDED HEREIN. THE MANUFACTURER SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES WHATSOEVER.

THIS WARRANTY SHALL BE EXTENDED TO COMPLY WITH STATE/PROVINCIAL LAWS AND REQUIREMENTS.



Yes, you can.™

Invacare Corporation www.invacare.com

USA

One Invacare Way
Elyria, Ohio USA
44036-2125
800-333-6900

Canada

570 Matheson Blvd E Unit 8
Mississauga Ontario
L4Z 4G4 Canada
800-668-5324

Invacare and Top End are registered trademarks of Invacare Corporation. Yes, you can., A4, Terminator and Transformer are trademarks of Invacare Corporation.

Dual Grip is a registered trademark of Sun Metal Products, Inc.

KIK is a registered trademark of KIK Technology, Inc.

Natural Fit is a registered trademark of Three Rivers.

Spinergy is a registered trademark of Spinergy, Inc.

3-in-1 oil is a registered trademark of American Home Products Corporation.

WD-40 is a registered trademark of WD-40 Company.

Loctite 242 is a trademark of the Loctite Corporation.

Teflon is a registered trademark of E.I. Du Pont De Nemours and Company.

© 2004 Invacare Corporation.

Part No 1114851

Rev C - 10/04